



VERSION	DESCRIPTION	DATE
1.0	New Release	2023/6/19

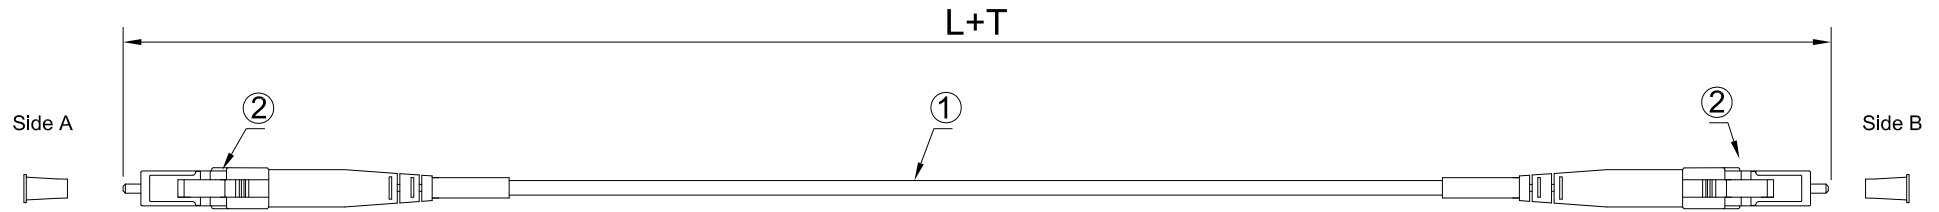

L	T
L<1M	+50/-0 mm
1M≤L<5M	+100/-0 mm
5M≤L<10M	+100/-50 mm
L≥10M	±1%*L

Cross-Section(8:1):

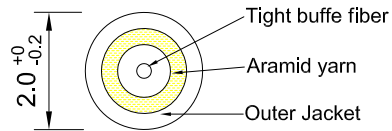

Notes:

- (1) Insertion loss(IL) ≤ 0.3 dB  
Return loss(RL) ≥ 65 dB
- (2) All materials are complied with RoHS directive

# MAG GmbH

6			TITLE		LC/APC-LC/APC,SM Simplex, 2.0mm,LSZH White, xxm		
5			UNIT	mm	P/N	xxx	DRAWN BY
4		unless otherwise stated Tolerances mm                    angular XXX.XX ±0.3        ±2° XX.XX ±0.2 X.XX ±0.1	Customer P/N		LWR-LCA-LCA-x	CHECK BY	
3			SIZE	SCALE	PAGE	1/2	APPROVAL BY
2	LC/APC 8° 2.0mm Simplex Connector (Green housing, Green boot, Yellow heat shrink tube )		A4	Free			
1	2.0mm,Simplex,SM-9/125,G652D LSZH, Optical Fiber Cable(White)						
No.	Description						