
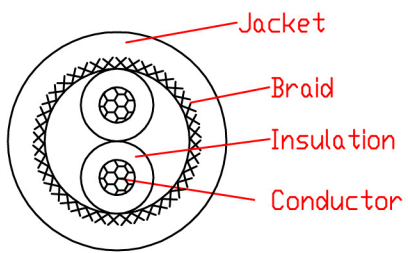
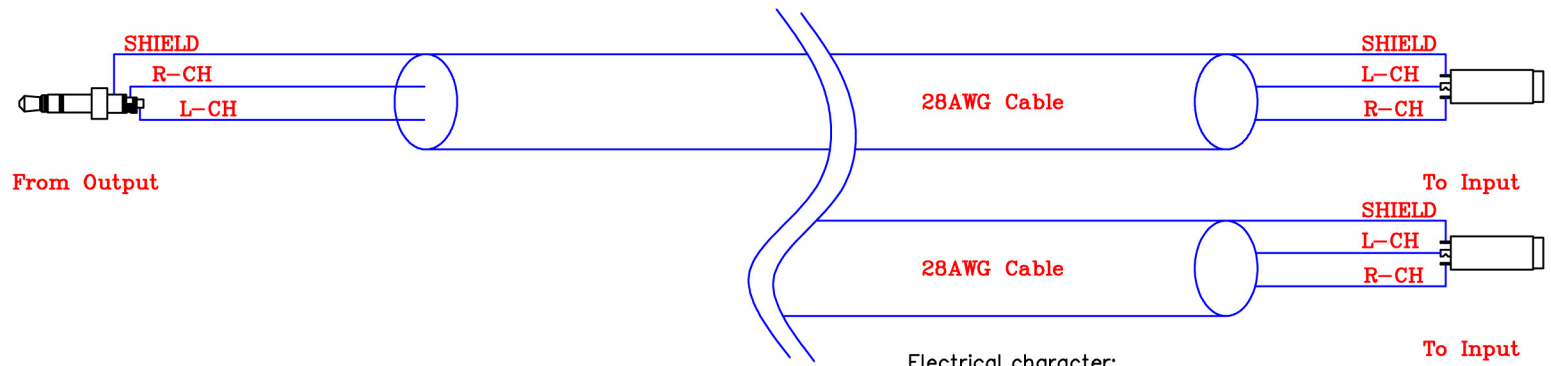


RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

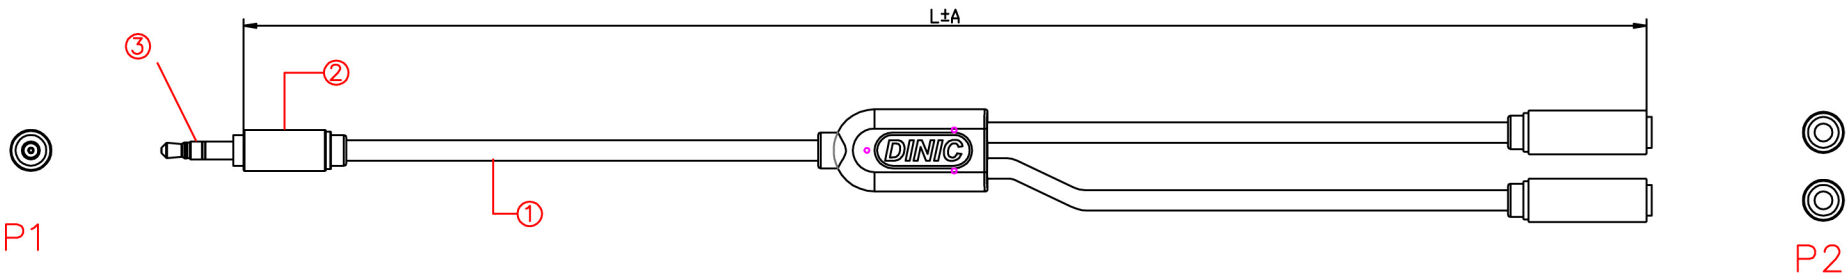

CABLE SPECIFICATION:
 28AWG Cable/∅∅:4.0mm/BK
 10/0.10BC*2C+AL+64#/0.10BC

Electrical character:

- a. 100% open & short testing.
- b. Withstanding voltage: DC 300V 0.01Sec.
- c. Insulation resistance: 10M Ohm(Min).
- d. Conductive resistance: 2 Ohm(Max).

L(mm)	A(mm)

3	CONNECTOR	Plug GOLD PLATED
2	OVERMOLD	PE LOW DENSITY BLACK
1	CABLE	28AWG Cable/∅∅:4.0mm/BK 10/0.10BC*2C+AL+64#/0.10BC

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
	INNERMOLD	TOLERANCE UNSPECIFIED <div style="display: flex; justify-content: space-around;"> ± ± ± ± </div> ANGLE <div style="display: flex; justify-content: space-around;"> ± ± </div>	
	OVERMOLD	DRAWN: Zhang DESIGNER: CHECKED: Kris APPROVED: Dived	

MO-KK-A			
⊕	≡	SCALE NON	UNIT mm
NAME Y type 3.5mm Male to 2* Female			SHEET 1/1
DRAWING NO. 180-180			REV 0.1