



WEIGHT	CUSTOMER NO:	REMARK
115g-K8		MAG

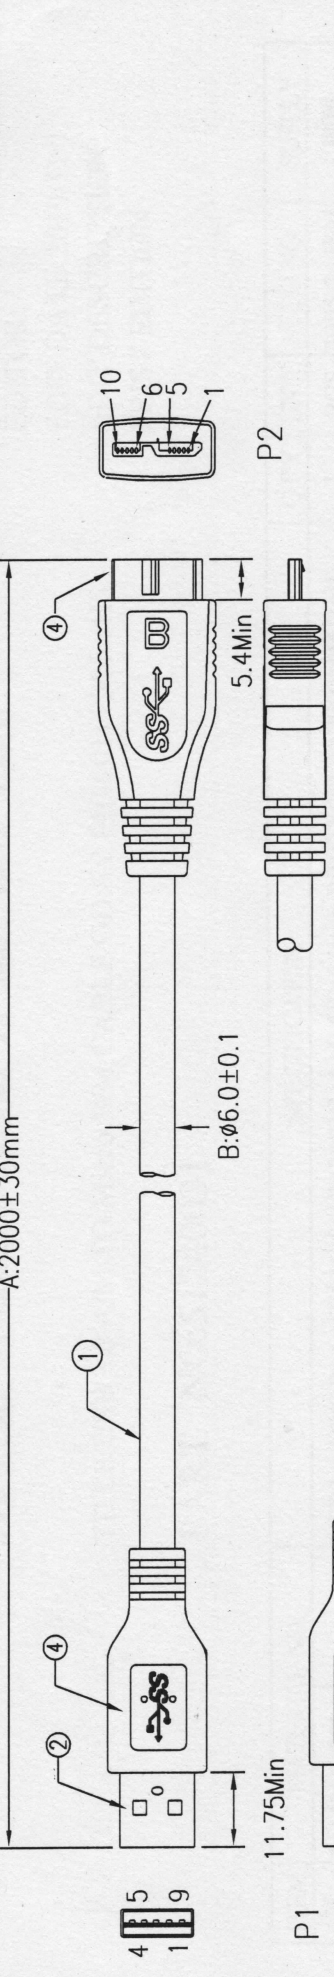

PINOUT: P1

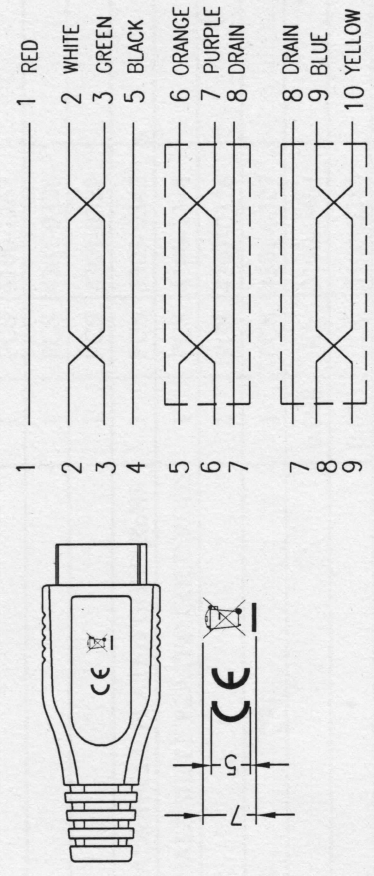


NOTES:

- 1) PRIMARY DIM: A, B
- 2) DIE NO P1: 0U04076. DIE NO P2: 0U04082
- 3) 100% SHORT CIRCUIT TEST (100% 短路測試)
- 4) CONDUCTION RESISTANCE: 5Ω (5M ABOVE 10~20Ω)
導通阻抗: 5Ω (5m以上 10~20Ω)
- 5) INSULATION RESISTANCE: 20MΩ (絕緣阻抗: 20MΩ)
- 6) HI-POT: 300V DC (高壓測試: 300V DC)
- 7) SWAY TEST: PRODUCT LINE 1.5 SECONDS
(SEMI-FINISHED PRODUCTS NOT REQUIRED)
搖擺測試: 成品線 1.5秒 (半成品不要求)
- 8) 產品符合 "ROHS" 標準。

4	OUTER JACKET PVC 45Pa WHITE RoHS
3	Micro USB 3.0 B/M BLACK SOLDER TYPE TERMINAL & SHELL PLATED GOLD RoHS
2	USB3.0 A/M 9P BLUE SOLDER TYPE TERMINAL & SHELL PLATED GOLD ROHS
1	USB3.0 UL20276 (28#1P+A+D)*2+28#1P+24#2C+A+B(112編) OD: 6.0mm WHITE(1901) 2000mm RoHS聯類

A	REV. ECR	PRIST EDITION	TGR	2019/11/1
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.		DESCRIPTION	C.N.	DATE
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		USB 3.0 A/M TO Micro B/M		
DIMENSIONS TOLERANCE		CHKD.		
0.00 TO 30.00mm ±0.10mm		CONF.		
30.01 TO 80.00mm ±0.13mm		DR. TGR		
80.01 TO 150.00mm ±0.15mm		APPD. <i>mm</i>		
150.01mm ±0.20mm		PART NO. 51240031		
MATERIAL	SCALE 1/1	UNIT MM	SIZE A4	REV. A
FINISH				



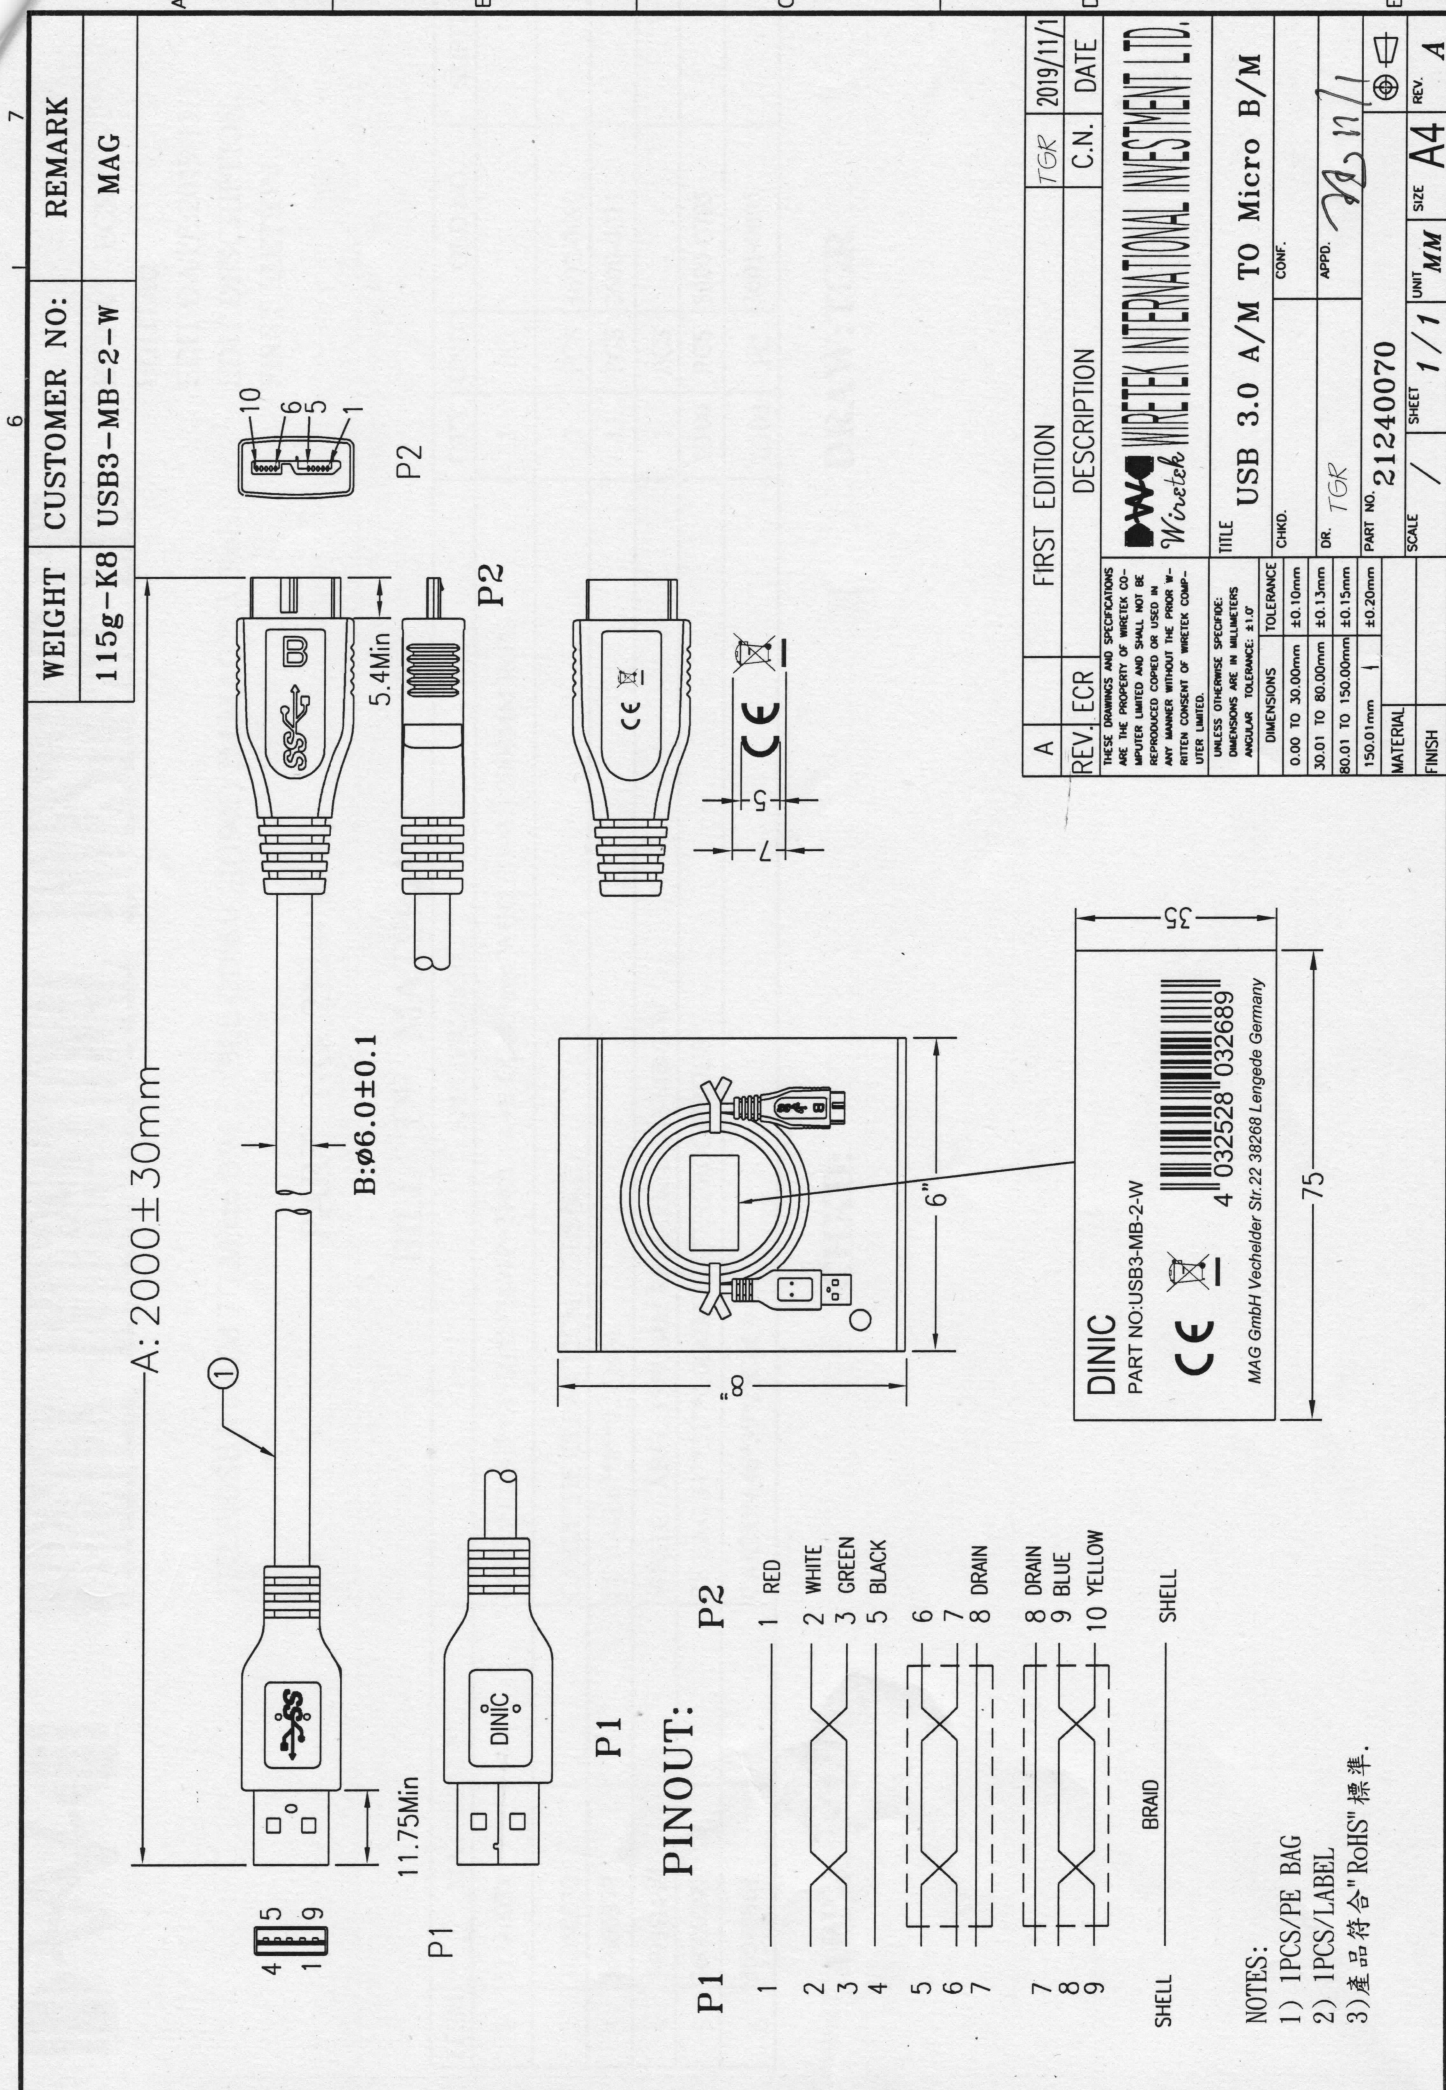

WEIGHT	CUSTOMER NO:	REMARK
115g-K8	USB3-MB-2-W	MAG

A	REV. ECR	FIRST EDITION	TGR	2019/11/1
DESCRIPTION		DATE		
WIRETEK INTERNATIONAL INVESTMENT LTD.				
TITLE		USB 3.0 A/M TO Micro B/M		
CHKD.		CONF.		
DIMENSIONS		APPD.		
TOLERANCE		PART NO.		
0.00 TO 30.00mm ±0.10mm		21240070		
30.01 TO 80.00mm ±0.13mm		SCALE		
80.01 TO 150.00mm ±0.15mm		1/1		
150.01mm ±0.20mm		UNIT		
MATERIAL		MM		
FINISH		SIZE		
		A4		
		REV.		
		A		

PINOUT:

P1	P2
1	1 RED
2	2 WHITE
3	3 GREEN
4	5 BLACK
5	6 BRAID
6	7 DRAIN
7	8 DRAIN
8	9 BLUE
9	10 YELLOW
SHELL	SHELL

- NOTES:
- 1) 1PCS/PE BAG
 - 2) 1PCS/LABEL
 - 3) 產品符合"RoHS"標準.