



REVISION	DATE	REV
NEW	2018/08/07	A/0

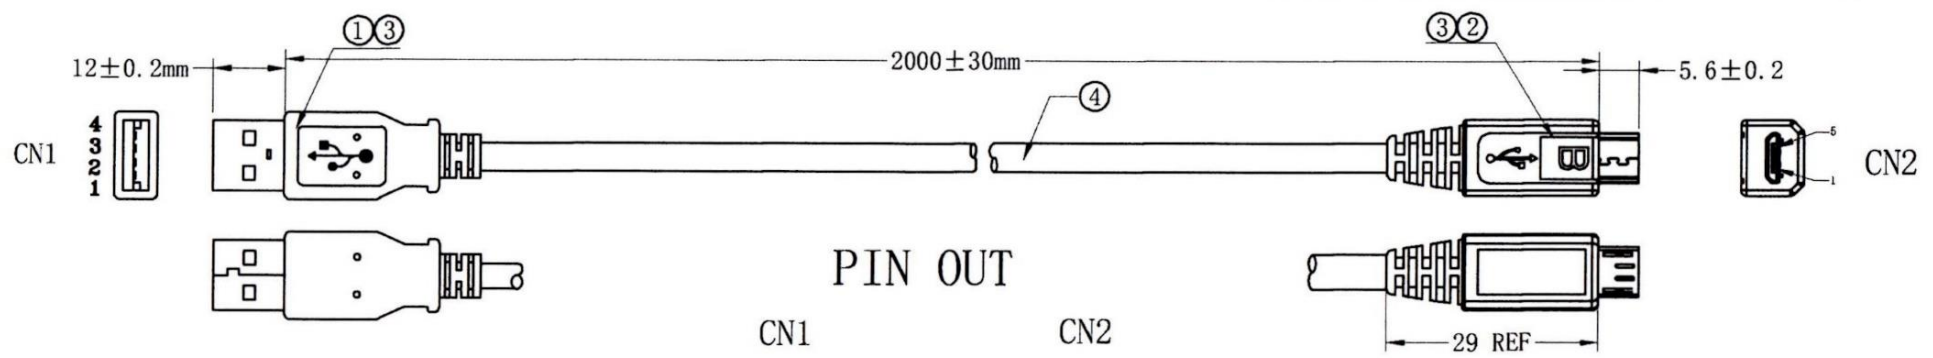


PIN OUT

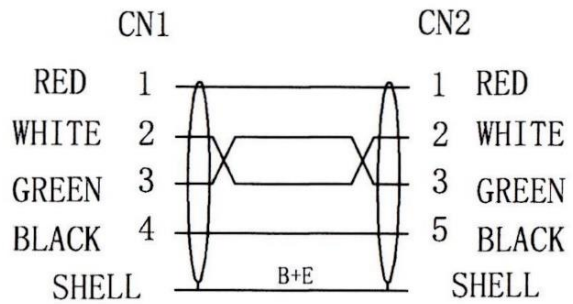

- NOTE:
- Electrical test:
    - 100% OPEN SHORT & MISS WIRE TEST;
    - Insulation impedance:DC 300V 10M OHM/Min;
    - Conductor resistance:3Ω Max;
    - Dielectric strength:100VAC/Sec, 1mA.
  - ROHS&REACH COMPLIANT
  - PRINTING: E258105 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 28AWG/2C



LABEL

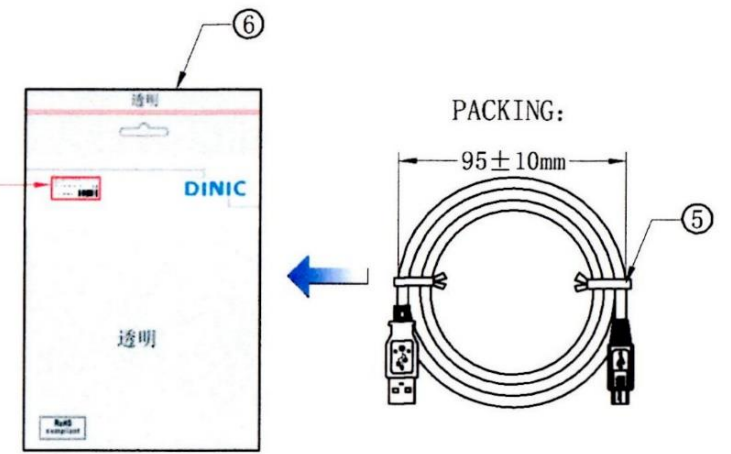

⑥	OEM BAG	(Customer supply) 120*200mm	1		
⑤	MINI TIE	Mini Tie.Color For BLACK L=100mm	2		
④	CABLE	USB 2.0 28AWG (7/0.12BC*1P)+28AWG (7/0.12BC*2C)+AEB B=0.12mm/3*16 AL-MG E=7/0.12BC JACKET:PVC/BLACK OD:4.0±0.2mm PRINTING INK:WHITE	1		
③	OVERMOLD	PVC BLACK 88A	2		
②	Micro BM	USB Micro BM Pin GOLD-PLATED FU" SHELL NI-PLATED	1		
①	USB AM	USB AM Pin GOLD-PLATED FU" SHELL NI-PLATED	1		
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	UNIT	备注

<b>MAG</b>		<b>USB-MB-2S</b>	
DRAW NO	TE7166	ITEM NO	USB CABLE AM-MICRO BM
CUSTOMER		PICTURE SHOWS	
PRODUCT NAME	*****	UNIT	mm
APPRO		CHECK	DRAWN YE