
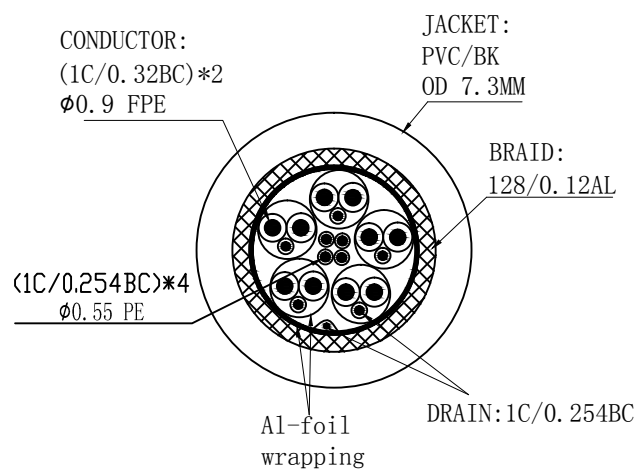



PIN Assignment

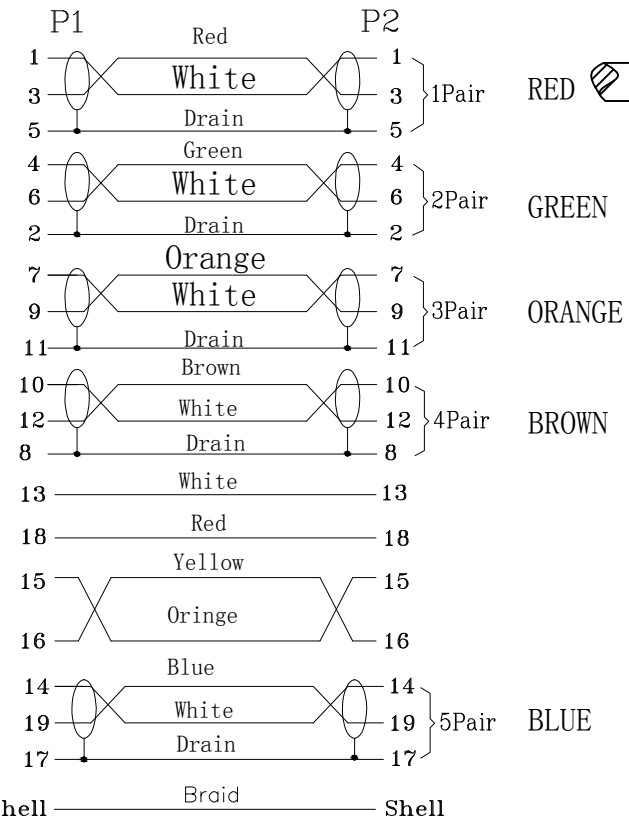

Electrical character:

- a: 100% open & short testing
- b: Withstanding voltage: DC 300V 0.01Ses
- c: Insulation resistance: 10M Ohm(Min)
- d: Conductive resistance: 2 Ohm(Max)

LENGTH
1000-3000±30
5000±50
10000±100

NOTES
 ALL MATETINALS MUST CONFORM TO RoHS STANDARD OF EUROPE

CABLE SPECIFICATION

28+30AWG [(1/0.32BC*1P+1/0.254BC+PE0.55+AL)
 *5C+(1/0.254BC+PE)*4C+AL+1/0.254BC+128/0.12AL
 OD:7.3mm BLACK

Product name	HDMI (M)-HDMI (M)				Drawing	ZHAN
	Rate	Free	Unit	mm	Audited	
Zhongshan Jiellua Electronics Technology Co.Ltd 中山市捷华电子科技有限公司					Approved	
					Date	2016.10.28

⑥	Dust cover(2pcs)	Transparent PVC
⑤	Connector(2PCS)	HDMI (M-M) Male to Male connector with gold plated
④	Ring(2PCS)	copper with gold plated
③	Metal Case(2sets)	Zinc-alloy with dark gun colour plated
②	Metal case Tail(2PCS)	Zinc-alloy with dark gun colour plated
①	CABLE	28+30AWG [(1/0.32BC*1P+1/0.254BC+PE0.55+AL) *5C+(1/0.254BC+PE)*4C+AL+1/0.254BC+128/0.12AL OD:7.3mm BLACK+Net
No	Part name	Meas