


**RoHS Compliant**

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

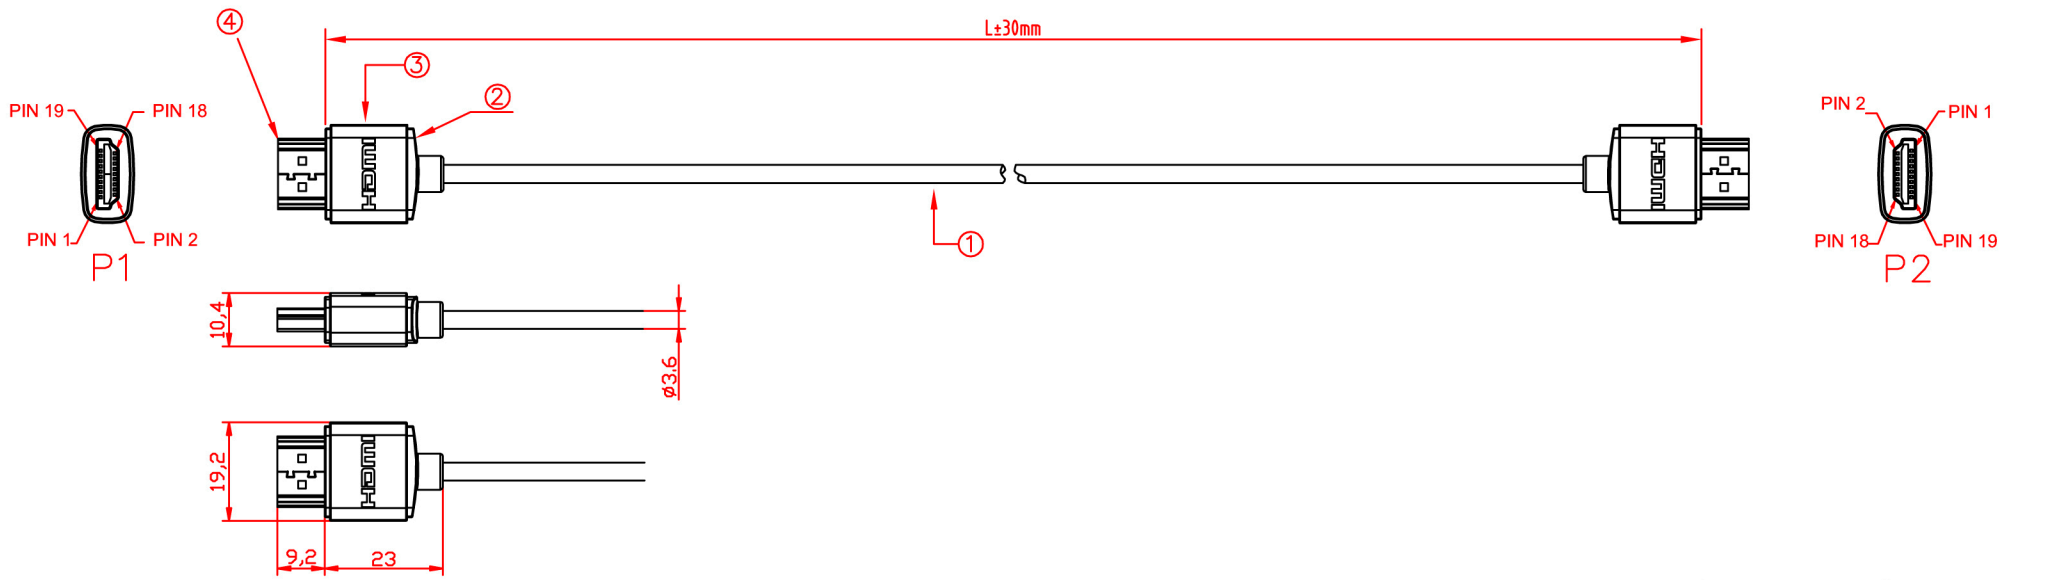


**ELECTRICAL CHARACTERISTICS:**  
 Rated Temperature: 80°C Rated Voltage:30V  
 Voltage Withstand: AC 500V/1min,NO Breakdown  
 Insulation Resistance: Min. 100Mohms/cable at 20°C

L(mm)	A(mm)
	30
	30

**PIN Assignment**

P1	Color	P2
1	Red	1
3	White	3
2	Drain	2
4	Green	4
6	White	6
5	Drain	5
7	Blue	7
9	White	9
8	Drain	8
10	Brown	10
12	White	12
11	Drain	11
13	Red	13
18	White	18
15	Yellow	15
16	Orange	16
14	YELLOW	14
19	White	19
17	Drain	17
Shell	Braid	Shell

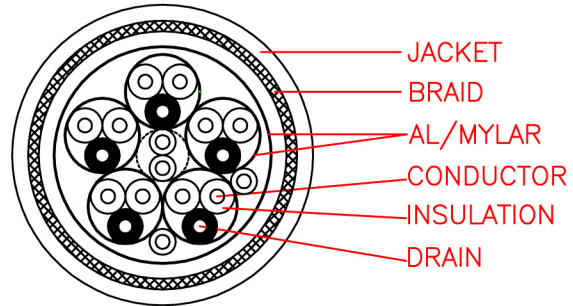

**CABLE SPECIFICATION:**  
 36AWG 1.4 HDMI Cable/OD:3.6mm/BK  
 (1P\*36AWG+D+AL)\*5C\*4C\*36AWG+AL+B

6			
5			
4	CONNECTOR	19 PINS HDMI GOLD PLATED	
3	OVERMOLD	PE LOW DENSITY 45P	
2	OVERMOLD	PE LOW DENSITY 45P	
1	CABLE	36AWG 1.4 HDMI Cable/OD:3.6mm/BK (1P*36AWG+D+AL)*5C*4C*36AWG+AL+B	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE
	INNERMOLD	TOLERANCE UNSPECIFIED ± ± ± ± ANGLE ±	
	OVERMOLD	DRAWN: zhang DESIGNER: CHECKED: KrIs APPROVED: Dived	
		<b>MO-HDMI</b>	
		SCALE NON	UNIT mm
		NAME	SHEET
		<b>HDMI A.A M.M 1.4A</b>	1/1
		DRAWING NO. 180-180	REV 0.1