



REV.	REMARK	DATE	SIGN.
①	Add DIM.	06/08/'20	LAI

RoHS

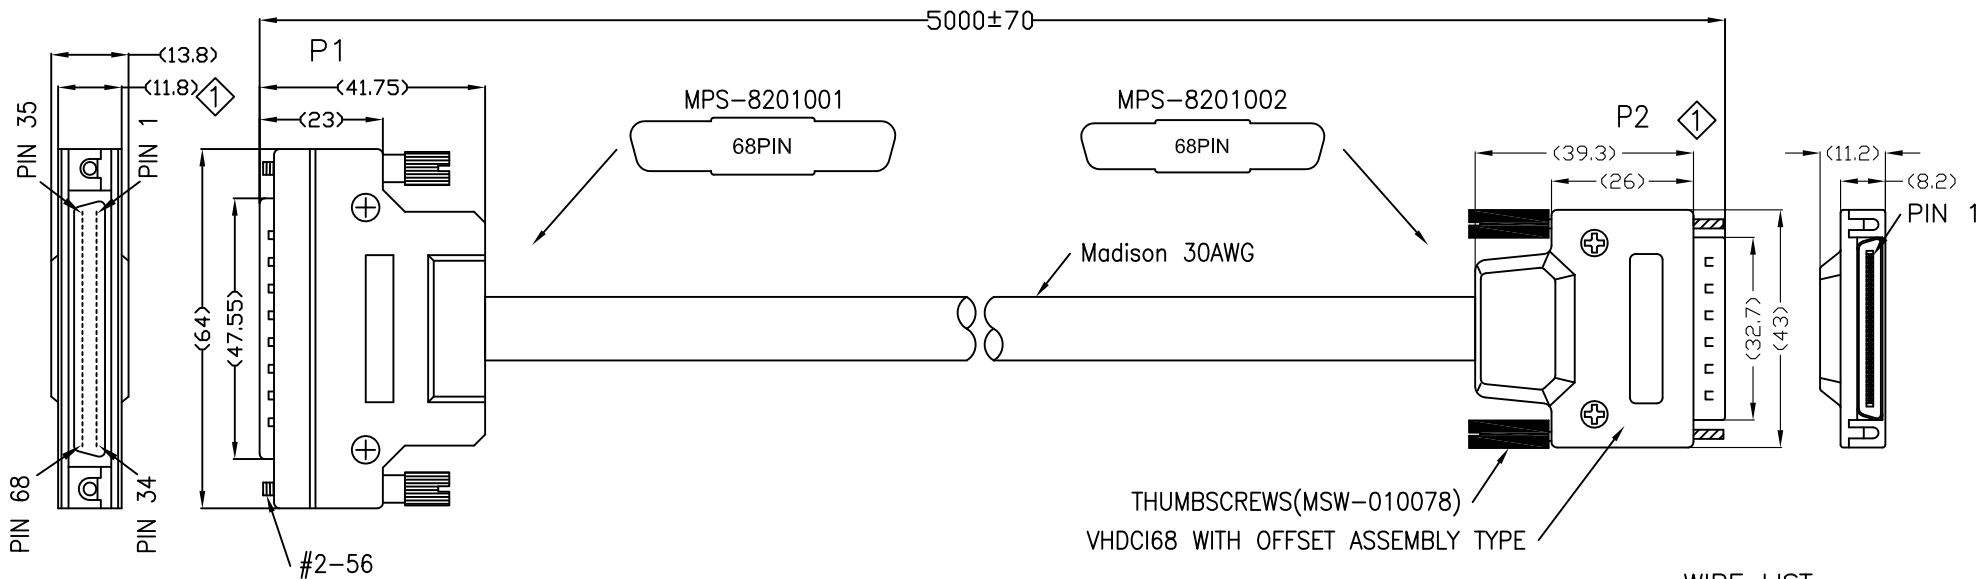

- HPDB 68PIN MALE TO VHDCI 68PIN MALE ROUND CABLE ASSEMBLY-RoHS
- CABLE SPEC: UL-20276, 30AWG, ALUMINIUM FOIL+BRAIDED(Madison 68KBKLF045), BLACK
SHIELDED: ALUMINIUM FOIL & TINNED COPPER BRAIDING
CONDUCTOR INSULATION MATERIAL: FOAMED POLYETHYLENE+SKIN
 - CONNECTOR:
P1: HPDB 68PIN MALE CONNECTOR: ASSEMBLY TYPE WITH DIE CASTING HOODS AND THUMBSCREWS #2-56.
P2: VHDCI 68PIN MALE CONNECTOR: OFFSET ASSEMBLY TYPE WITH DIE CASTING HOODS AND THUMBSCREWS(MSW-010078)

3.LABELING ON BAG:

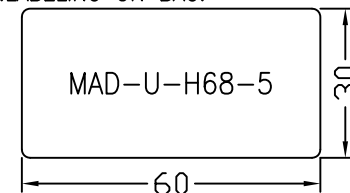

WIRE LIST	
P1	P2
1	1
35	35
2	2
36	36
3	3
37	37
32	32
66	66
33	33
67	67
34	34
68	68
SHELL	SHELL

UNICONN CORPORATION 科懋實業有限公司	DESC.	HPDB 68PIN MALE TO VHDCI 68PIN MALE CABLE	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	①
	P/N	UASS-RC009082	CUSTOMER P/N	MAD-U-H68-5	Sino	DATE	06/08/'20	DWG NO:	DWG\RC\9082		

1 2 3 4 5 6 7 8 9