東莞永力電業有限公司 YUNG LI CO., LTD

Da Pu Industrial Zone, Gang Zi, Changping Town, Dong Guan City, Guangdong 523571 China.P.R.C

TEL:0769-83396797~8 FAX:0769-83396796

E-mail: sales@yung-li.com

Description: YP-21A/YC-13

Customer: MAG

Parts No.: CB-8-05M

Draw No.:

REVISION RECORD


1	
2	
3	
4	
5	

YUNG LI						
CHECKED	PREPARED BY					

CUSTOMER	APPROVED






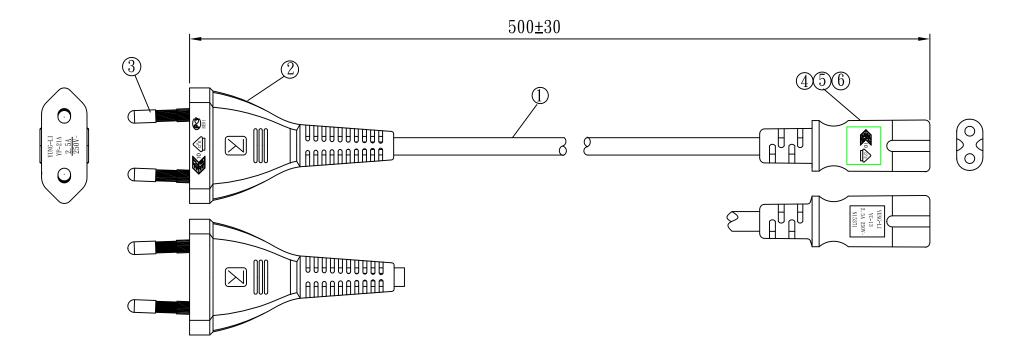


Sample Drawing NO.


NO.	SPECIFICATION	Q' TY	REMARK
1	H03VVH2-F 0.75/2C BLACK	1PC	
2	YP-21A PVC PLASTIC:55P BLACK	18g/PC	
3	Europe plug inner model:P98003P-A	1PC	
4	YC-13 TER	2PCS	
5	YC-13 H. S. G	1PC	
6	YC-13 PVC PLASTIC:50P BLACK	9g/PC	


	Approved		Date			VIIN	C I I (CO.,L	rn
Tolerance >0±0.30	Checked		Date			TON	GLI	JO.,L	טו
>1. 0±0. 50 >10. 0±1. 0	Drawn	SUKI	Date	12.08	.17	Customer	MA	4G	
>20. 0±2. 0	Cat. No.	YP-2	A/YC-	13		P/N.	CB-8	8-05M	
Angle: ±1°	Drowing No.			Rev.	В	Material	P. V. C	Unit	mm
	Drawing No.			nev.		Scale		•	

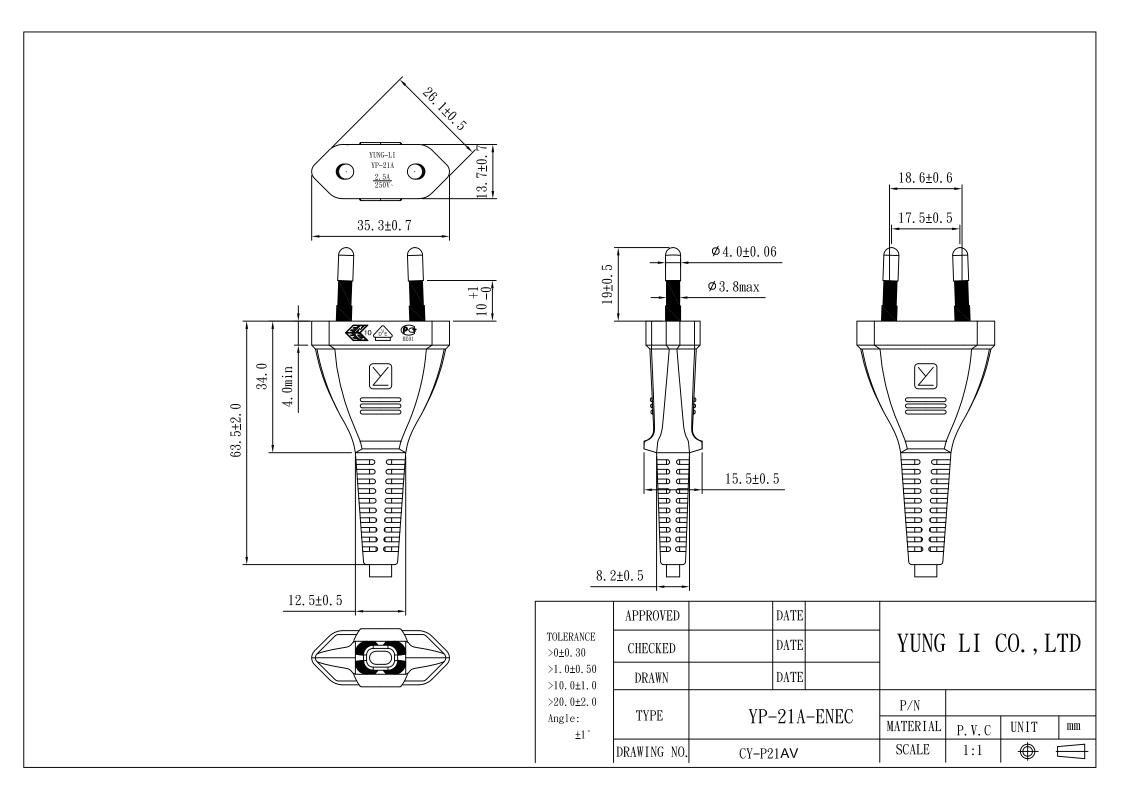



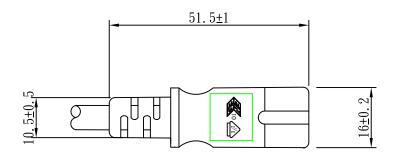



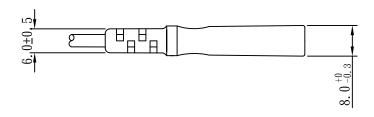



	APPROVED		DATE					
TOLERANCE >0±0.30	CHECKED		DATE		YUNG	LI (CO., L	TD.
>1. 0±0. 50 >10. 0±1. 0	DRAWN	羅生英	DATE	10. 09. 08				
>20. 0±2. 0	TYPE	YC-1	9		CUSTOMER			
Angle: ±1°	TIFE	10-1	ა		MATERIAL	P. V. C	UNIT	mm
	DRAWING NO.	CY-C1	13V		SCALE	1:1	-	

YUNG LI CO., LTD SPECIFICATION

Yung Li	Ctvlo	DVC ELEVIDI E CODOS	Document No	
2012.7.25	Style	PVC FLEXIBLE CORDS		
Edition	Size	1103VVVII 2 F 2 - 0 752	Page	
A	Size	$H03VVH2-F 2 \times 0.75mm^2$	1/2	
1. Standard:	IEC 227 I	EC228		
2. Construction	on & Dimen	sion		
]	Item	Specification	
		Size	$2 \times 0.75 \text{mm}^2$	
Conductor		Material	Annealed Bare Copper	
		Construction	24 / § 0.202±0.01	
Insulation		Material	PVC	
		Minimum Average Thickness	0.50mm	
		Minimum Thickness at any point	0.35mm	
		Diameter	2.15 ± 0.10	
		Identification	Blue,Brown	
		Core Twist	2-Core	
Core Assembly		Filler	NA	
		Assembly Pair	NA	
Taping		Mylar Foil	NA	
Shielded		A1-Mylar Foil	NA	
Drain		Material	NA	
Drain		Construction	NA	
		Material	PVC	
		Minimum Average Thickness	0.60mm	
Jacket		Minimum Thickness at any point	0.41mm	
		Overall Diameter(Approx)	$3.4 \pm 0.1/5.6 \pm 0.15$	

Marking:

Color

Yung Li Co., Ltd. H03VVH2-F 2X0.75mm² \lhd VDE \triangleright NF-USE 1347 N KEMA-KEUR \triangle CEBEC \lhd \circlearrowleft \triangleright D FI N S S IEMMEQU Q04083 CC A004049 60227 IEC 52(RVV) 300/300V S SU01027-4001


Any Color

YUNG LI CO., LTD

SPECIFICATION

ST Zen Territor (
Yung Li	Style	PVC FLEXIBLE CORDS	Document No			
2012.7.25	Style	F VC PLEXIBLE CORDS				
Edition	Size	11023/3/112 E 2 0 75 2	Page			
A	Size	$H03VVH2-F 2 \times 0.75mm^2$	2/2			
3.Electrical & Physical Properties						

3.Electrical &	z Physical P	roperties		
	Item		Specification	
Rating Voltage			70°C 300V	
Conductor resistance(AT 20°C)		∵20°C)	26.0 Ω/Km MAX	
Insulation Resistance(AT 70°C)		770°C)	0.010M Ω/Km Min	
Dielectric Strength			AC 2.0 KV / 15 min No Brcak	
Spark Test			5.0KV	
	Unaged	Tensile Strength	1500 lbs/in ² min	
Insulation	Onaged	Elongation	150% Min	
msuration	Aged	Tensile Strength	80~120% (80°C x168hrs)	
	71500	Elongation	80~120% (80°C x168hrs)	
	Unaged	Tensile Strength	1500 lbs/in ² min	
Jacket	Onaged	Elongation	150% Min	
Jacket	Aged	Tensile Strength	80~120% (80°C x168hrs)	
	Ageu	Elongation	80~120% (80°C x168hrs)	
Deformation Test			70 ± 4 °C X 1hr ≤ 50%	
Cold Bend Test			-15°C x 4hr No Crack	
Heat Shock T	Test		150±2°C x 1hr No Crack	

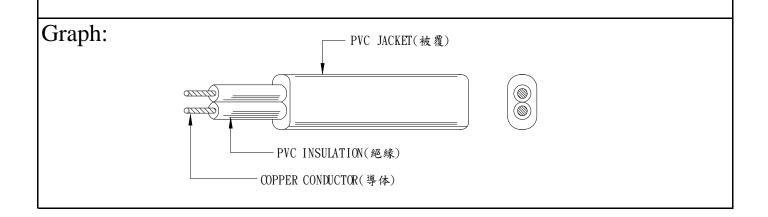

VDE Prüf- und Zertifizierungsinstitut

ZEICHENGENEHMIGUNG MARKS APPROVAL

Yung-Li Co. Ltd.
Da Pu Industrial Zone, Cang Zi
Chang Ping Town
523571 DONG GUAN CITY
Guangdong
CHINA

ist berechtigt, für ihr Produkt / is authorized to use for their product

Stecker ohne Schutzkontakt, nicht wiederanschließbar, umspritzt Plug, without earthing contact, non-rewirable, moulded

die hier abgebildeten markenrechtlich geschützten Zeichen für die ab Blatt 2 aufgeführten Typen zu benutzen / the legally protected Marks as shown below for the types referred to on page 2 ff.



(DYE)

Geprüft und zertifiziert nach / Tested and certified according to

DIN VDE 0620 Teil 101:1992-05; EN 50075:1990

Akterizeichen: 1609800-1560-0005 / 157584 File ref.:

Ausweis-Nr. 40022312

Certificate No.

- Blatt 1 - Page

Weitere Bedingungen siehe Rückseite eind Folgebildter funtuar conditions see overleef and following pages

Offenbach, 2007-10-05 (letzte Anderung/updated 2012-05-03)

http://www.vde.com/zertifikat http://www.vde.com/certificate

VDE Prüf- und Zertifizierungsinstitut GmbH VDE Testing and Certification Institute Zertifizierungsstelle / Certification

J.: Gütermann

VDE Zertifikate sind nur gültig bei Veröffentlichung unter: VDE certificates are valid only when published on:





VDE Prüf- und Zertifizierungsinstitut Zeichengenehmigung

Ausweis-Nr. / Blatt / Certificate No. page 40022312 2

Name und Sitz des Genehmigungs-Inhabers / Name andregistered seat of the Certificate holder
Yung-Li Co. Ltd., Da Pu Industrial Zone, Cang Zi, Chang Ping Town, 523571 DONG GUAN CITY,
Guangdong, CHINA

Aktenzeichen / File ref. 1609800-1560-0005 / 157584 / FG45 / SHA letzte Änderung / updated Datum / Date 2012-05-03 2007-10-05

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Zeichengenehmigungsausweises Nr. 40022312 This supplement is only valid in conjunction with page 1 of the Certificate No. 40022312.

Stecker ohne Schutzkontakt, nicht wiederanschließbar, umspritzt Plug, without earthing contact, non-rewirable, moulded

Typ(en) / Type(s):

YP-21A

Bemessungsspannung

Rated voltage

AC 250 V

Bemessungsstrom

Rated current

2,5 A

Polzahl

Number of poles

zweipolige Ausführung(en) ohne Schutzkontakt two-pole version(s) without earthing contact

Rauart

Kind of construction

Normblatt 1

Standard sheet 1

Schutzart

Degree of protection

IP20

Produktinformation
Product information

siehe Anlage Nr.: 100A see Appendix No.: 100A

Warenzeicheninhaber Trademark holder Yung-Li Co. Ltd.

Hinw eis Notice Jedes Gerät, das mit einem Eurostecker ausgerüstet und für den Gebrauch in Großbritannien bestimmt ist, muß mit einer Warnkennzeichnung mit folgendem Inhalt ausgerüstet sein: Any appliance fitted with a Eurolig and intended for use

in the UK shall carry a warning label stating:

"Within the UK, this appliance may only be used when supplied from a shaver supply unit in accordance with EN 61558-2-5 and must not be connected to a UK mains sockel."

Fortsetzung siehe Blatt 3 / continued on page 3

VDE Priff- und Zertifizierungsinstitut GrabH * Testing and Certification Institute

VDE Prüf- und Zertifizierungsinstitut GmbH
Diese Anlage gilt nur in Verbindung mit Blatt 1 der Zeichengenehmigung
This Appendix is only valid in conjunction with page 1 of the marks approval

Innene Insert:	Werk:	Werk Mater			Position im VDE-Ausweis Position in VDE-approval	Stecker Plug	A THE PROPERTY OF THE PROPERTY
Inneneinsatz: Insert:	Werkstoff der Trägerteile: Material of the base:	Werkstoff der Umspritzung: Material of the moulding:		YP-21A	Typ(en) Type(s)		
	ägertelle: 1836:	mapritzung: noulding:				polig ohr	
Typ; Hersteller Type; manufacturer	Typ; Hersteller; Farbe Type; manufacturer; colour	j: Тур; Farbe <i>Туре; colour</i>		YUNG LI	Leitungsaufdruck Marking on cable	2-polig ohne Schutzkontakt 2-pole without earthing contact	
	<i>Nour</i>						ZEICHENGENEHMIGUNG MARKS APPROVAL
P98003P GEM	PBT; 1 Chang	PVC; type CS-9731-WB E1777 Chia Shin Enterprises Co., Ltd		l ×	H03VVH2-F 2x 0,5 mm ² (max. 2 m)	Ausführung: Construction:	UNG
ဍ	PBT; Type: 4830BK; schwarz / black Chang Chun Plastic Co., Ltd.	PVC; type CS-9731-WB E177713; alle Farben / all colours Chia Shin Enterprises Co., Ltd	×	^ ×	H03VVH2-F 2x 0,75 mm ² H05VVH2-F 2x 0,75 mm ²		
	830BK Plastic	9-9731- terprise	1	×	H05VVH2-F 2x 1,0 mm²	3."	
java Ma	Co., L	WBE.	genehmigte Ausfühn	ı	H03VV-F 2x 0,5 mm ² (max. 2 m)	zentrale straight	
	arz / bi	Ltd	igte /	×	H03VV-F 2x 0,75 mm²	/// Zabe Le	
	ec.k	alle	usfül	×	H05VV-F 2x 0,75 mm²	straight cable entry	
		arben	gnur	×	H05VV-F 2x 1,0 mm²		
		l all co		ı	H05VV-F 2x 1,5 mm²	Inführung	
		lours	l approved version	ı	H05RR-F 2x 0,75 mm²		
			d ver	ı	H05RR-F 2x 1,0 mm²		Aktenze File ref.: 1609800
			sion	1	H05RR-F 2x 1,5 mm²		Aktenzeichen: File ref.: 1609800-1560-0005 / 157584
				ı	H05RN-F 2x 0,75 mm ²		60-00
				ı	H05RN-F 2x 1,0 mm²)05 / 1
				ı	H07RN-F 2x 1,0 mm²		15758
			ht ge	I	H07RN-F 2x 1,5 mm²		4
			nehm	×	H03V2V2-F 2x 0,75 mm²	App	App 400
			ligt /	×	H03V2V2H2-F 2x0,75 mm²	Anlage-Nr.: Appendix No.:	Ausweis-Nr.: Approval No.: 40022312
			nicht genehmigt / not approved	×	H05V2V2-F 2x 0,75 mm²		No.:
			pprov	×	H05V2V2-F 2x 1,0 mm²	100A	Datum Date 2012-0
	,	-	be	I	H05V2V2-F 2x 1,5 mm²		Datum <i>Date</i> 2012-05-03
	The state of the s			×	H05V2V2H2-F 2x0,75 mm²	The state of the s	3



DE Prüf- und Zertifizierungsinstitut


ZEICHENGENEHMIGUNG MARKS APPROVAL

Yung-Li Co. Ltd. Da Pu Industrial Zone Chang Ping Town 523571 DONG GUAN CITY Guangdong CHĪNA

ist berechtigt, für ihr Produkt / is authorized to use for their product

Gerätesteckdose, nicht-wiederanschließbar Connector, non-rewirable

die hier abgebildeten markenrechtlich geschützten Zeichen für die ab Blatt 2 aufgeführten Typen zu benutzen / the legally protected Marks as shown below for the types referred to on page 2 ff.





Geprüft und zertifiziert nach / Tested and certified according to

DIN EN 60320-1 (VDE 0625-1):2008-05; EN 60320-1:2001 + A1:2007

VDE Prüf- und Zertifizierungsinstitut GmbH VDE Testing and Certification Institute Zertifizierungsstelle / Certification

VDE Zertifikate sind nur gültig bei Veröffentlichung unter: VDE certificates are valid only when published on: Aktenzeichen: 1609800-1550-0005 / 117700 File ref.:

Ausweis-Nr. 40029072

Blatt 1 Page

Certificate No. Weitere Bedingungen siehe Rückseile und Folgeblätter i further conditions see overleef and following pages

Offenbach, 2010-01-08

http://www.vde.com/zertifikat http://www.vde.com/certificate





VDE Prüf- und Zertifizierungsinstitut Zeichengenehmigung

Blatt / Ausweis-Nr. / Certificate No. page 40029072 2

Name und Sitz des Genehmigungs-Inhabers / Name and registered seat of the Certificate holder Yung-Li Co. Ltd., Da Pu Industrial Zone, Chang Ping Town, 523571 DONG GUAN CITY, Guangdong, **CHINA**

Aktenzeichen / File ref. 1609800-1550-0005 / 117700 / FG31 / E Datum / Date 2010-01-08

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Zeichengenehmigungsausweises Nr. 40029072. This supplement is only valid in conjunction with page 1 of the Certificate No. 40029072.

Gerätesteckdose, nicht-wiederanschließbar Connector, non-rewirable

Typ(en) / Type(s):

1) YC-13

2) YC-13L

3) YC-13D

Bemessungsspannung

Rated voltage

AC 250 V

Bemessungsstrom

Rated current

2,5 A

Polzahl

Number of poles

2-polig ohne Schutzkontakt

2-pole without earthing contact

Kind of construction

Normblatt C7

standard sheet C7

Anmerkung(en)

Gerätesteckdosen ohne Schutzkontakt müssen Teil

einer Geräteanschlußleitung oder einer

Weiterverbindungs-Geräteanschlußleitung sein.

Connectors without earthing contact shall be part of a cord set or interconnection cord set

Remark(s)

Produktinformation Product information

siehe Anlage Nr. 100 + 200 + 900 see Appendix No. 100 + 200 + 900

Warenzeicheninhaber

Trademark holder

Yung Li Co. Ltd.

Fortsetzung siehe Blatt 3 / continued on page 3

DE Prüf- und Zertifizierungsinstitut

ZEICHENGENEHMIGUNG MARKS APPROVAL

Yung-Li Co. Ltd. Da Pu Industrial Zone, Cang Zi Chang Ping Town \$23571 DONG GUAN CITY Guangdong: CHINA

elist berechtigt, für ihr Produkt / Sis authorized to use for their product

Flexible Leitung Flexible cable (cord)

die hier abgebildeten markenrechtlich geschützten Zeichen für die ab Blatt 2 aufgeführten Typen zu benutzen / the degally protected Marks as shown below for the types referred to on page 2 ff.

Geprüft und zertifiziert nach / Tested and certified according to

DIN VDE 0281-5 (VDE 0281 Tell 5):2002-09; HD 21.5 S3:1994 + A1:1999 + A2:2001

VDE Prüf-vund Zertiftzierungsinstitut GmbH. Ausweis-Nr. 40010145 nd Certification Institute

VDE Zertifikate sind nur gültig bei Veröffentlichung unter: VDE certificates are valid only when published on: Aktenzeichen: 1609800-5140-0005 / 159386 File ref.:

Blatt 1

Certificate No.

Weltere Bedingungen siehe Rückselte und Folgeblätter / further conditions see overleef and following pages

Offenbach, 2004-04-27

(letzte Änderung/updated 2012-03-27)

http://www.vde.com/zertifikat http://www.vde.com/certificate





VDE Prüf- und Zertifizierungsinstitut Zeichengenehmigung

Ausweis-Nr. / Blatt / Certificate No. page 40010145 2

Name und Sitz des Genehmigungs-Inhabers / Name andregistered seat of the Certificate holder Yung-Li Co. Ltd., Da Pu Industrial Zone, Cang Zi, Chang Ping Town, 523571 DONG GUAN CITY, Guangdong, CHINA

Aktenzeichen / File ref. 1609800-5140-0005 / 159386 / FG42 / STR letzte Änderung / updated Datum / Date 2012-03-27 2004-04-27

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Zeichengenehmigungsausweises Nr. 40010145 This supplement is only valid in conjunction with page 1 of the Certificate No. 40010145.

Flexible Leitung Flexible cable (cord)

Typ(en) / Type(s):

H03VV-F 2...4 x 0,5...0,75 mm² H03VVH2-F 2 x 0,5...0,75 mm² H05VV-F 2...5 x 0,75...4 mm² H05VVH2-F 2 x 0,75...1,0 mm²

Firmenzeichen

YUNG LI

Trademark

Dieser Zeichengenehmigungs-Ausweis bildet eine Grundlage für die EG-Konformitätserklärung und CE-Kennzeichnung durch den Hersteller oder dessen Bevollmächtigten und bescheinigt die Konformität mit den grundlegenden Schutzanforderungen der EG-Niederspannungsrichtlinie 2006/95/EG mit ihren Änderungen.

This Marks Approval is a basis for the EC Declaration of Conformity and the CE Marking by the manufacturer or his agent and proves the conformity with the essential safety requirements of the EC Low-Voltage Directive 2006/95/EC including amendments.

VDE Prüf- und Zertifizierungsinstitut GmbH VDE Testing and Certification Institute Fachgebiet FG42 Section FG42

Merianstrasse 28, D-63069 Offenbach

hone + 49 (0) 69 83 06-0





Report No.:RLSZE0011899302 Page 1 of 15

Applicant: YUNG LI CO.,LTD

Address :DA PU INDUSTRIAL ZONE, GANG ZI, CHANG PING TOWN, DONG GUAN

CITY, GUANG DONG 523571 CHINA

Report on the submitted sample(s) said to be:

No.	Sample 1	Names	Sample Description
1		PVC BLACK	Black plastic grains
2		PVC WHITE	White plastic grains
3		PVC BROWN	Brown plastic grains
4		PVC BLUE	Blue plastic grains
5		PVC YELLOW	Yellow plastic grains
6	AC/DC POWER CORD	PVC GREEN	Green plastic grains
7	& PLUG ADAPTERS	PVC RED	Red plastic grains
8		INK	White liquid
9		CABLE COPPER	Cupreous metal
10		INNERBODY	White plastic
11		TERMINAL COPPER	Golden color metal
12		COPPER ALLOY	Metal with silvery plating

Part No. :Please refer to the page 13.

Sample Received Date :Mar. 2, 2012

Testing Period :Mar. 2, 2012 to Mar. 8, 2012

Test Requested :As specified by client, to test Lead(Pb), Cadmium(Cd), Mercury(Hg),

Hexavalent Chromium(Cr(VI)), Polybrominated Biphenyls(PBBs), Polybrominated Diphenyl Ethers(PBDEs), Polycyclic Aromatic

Hydrocarbons(PAHs), Perfluorooctane Sulfonates(PFOS), Tetrabromobisphenol-A (TBBP-A) in the submitted sample(s).

Test Method: Please refer to the following page(s).

Test Result(s): Please refer to the following page(s).

Technical Manager

Tested by

Approved by

Inspected by

Mar. 8, 2012

No. 38475376







Test Method:

Page 2 of 15

Tested Item(s)	Test Method	Measured Equipment(s)	MDL
	IEC 62321:2008 Ed.1 Sec.8		
Lead (Pb)	IEC 62321:2008 Ed.1 Sec.9	ICP-OES	2 mg/kg
(*)	IEC 62321:2008 Ed.1 Sec.10		
	IEC 62321:2008 Ed.1 Sec.8		
Cadmium (Cd)	IEC 62321:2008 Ed.1 Sec.9	ICP-OES	2 mg/kg
	IEC 62321:2008 Ed.1 Sec.10		
Mercury (Hg)	IEC 62321:2008 Ed.1 Sec.7	ICP-OES	2 mg/kg
Hammalant Characters (Ca(M))	IEC 62321:2008 Ed.1 Annex B	UV-Vis	/
Hexavalent Chromium (Cr(VI))	IEC 62321:2008 Ed.1 Annex C	U V-VIS	2 mg/kg
Polybrominated Biphenyls (PBBs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5 mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5 mg/kg
Perfluorooctane Sulfonates (PFOS)	Refer to US EPA 3550C:2007	LC-MS-MS	5 mg/kg
Tetrabromobisphenol-A (TBBP-A)	Refer to US EPA 3540C:1996	GC-MS	5 mg/kg
Polycyclic Aromatic Hydrocarbons (PAHs)	Refer to US EPA 3550C:2007& US EPA 8270D:2007	GC-MS	0.2 mg/kg









Page 3 of 15

Test Result(s):

	Content					
Tested Item(s)	Sample No.1	Sample No.2	Sample No.3	Sample No.4		
Lead (Pb)	N.D.	N.D.	N.D.	N.D.		
Cadmium (Cd)	N.D.	N.D.	N.D.	N.D.		
Mercury (Hg)	N.D.	N.D.	N.D.	N.D.		
Hexavalent Chromium (Cr(VI))	N.D.	N.D.	N.D.	N.D.		
Perfluorooctane Sulfonates (PFOS)	N.D.	N.D.	N.D.	N.D.		
Tetrabromobisphenol-A (TBBP-A)	N.D.	N.D.	N.D.	N.D.		

		Cor	ntent	
Tested Item(s)	Sample No.5	Sample No.6	Sample No.7	Sample No.8
Lead (Pb)	N.D.	N.D.	N.D.	N.D.
Cadmium (Cd)	N.D.	N.D.	N.D.	N.D.
Mercury (Hg)	N.D.	N.D.	N.D.	N.D.
Hexavalent Chromium (Cr(VI))	N.D.	N.D.	N.D.	N.D.
Perfluorooctane Sulfonates (PFOS)	N.D.	N.D.	N.D.	N.D.
Tetrabromobisphenol-A (TBBP-A)	N.D.	N.D.	N.D.	N.D.
(0)	(6,)		(6,)	•

	Content					
Tested Item(s)	Sample No.9	Sample No.10	Sample No.11	Sample No.12		
Lead (Pb)	N.D.	9mg/kg	40 mg/kg	19760 mg/kg		
Cadmium (Cd)	N.D.	N.D.	N.D.	4 mg/kg		
Mercury (Hg)	N.D.	N.D.	N.D.	N.D.		
Hexavalent Chromium (Cr(VI))	1.	N.D.		/		
Perfluorooctane Sulfonates (PFOS)	1	N.D.	1	/		
Tetrabromobisphenol-A (TBBP-A)	1	N.D.		/		

Tested Item(s)	Conclusion				
Tested Item(s)	Sample No.9	Sample No.11	Sample No.12		
Hexavalent Chromium (Cr(VI))	Negative	Negative	Negative		









Test Result(s):

Page 4 of 15

To -4 - 1 14 (-)		Content	
Tested Item(s)	Sample No.1	N.D. N.D.	Sample No.3
Polybrominated Biphenyls(PBBs)			
Monobromobiphenyl	N.D.	N.D.	N.D.
Dibromobiphenyl	N.D.	N.D.	N.D.
Tribromobiphenyl	N.D.	N.D.	N.D.
Tetrabromobiphenyl	N.D.	N.D.	N.D.
Pentabromobiphenyl	N.D.	N.D.	N.D.
Hexabromobiphenyl	N.D.	N.D.	N.D.
Heptabromobiphenyl	N.D.	N.D.	N.D.
Octabromobiphenyl	N.D.	N.D.	N.D.
Nonabromobiphenyl	N.D.	N.D.	N.D.
Decabromobiphenyl	N.D.	N.D.	N.D.
Polybrominated Diphenyl Ethers(PB	DEs)	· ` `	_°`
Monobromodiphenyl ether	N.D.	N.D.	N.D.
Dibromodiphenyl ether	N.D.	N.D.	N.D.
Tribromodiphenyl ether	N.D.	N.D.	N.D.
Tetrabromodiphenyl ether	N.D.	N.D.	N.D.
Pentabromodiphenyl ether	N.D.	N.D.	N.D.
Hexabromodiphenyl ether	N.D.	N.D.	N.D.
Heptabromodiphenyl ether	N.D.	N.D.	N.D.
Octabromodiphenyl ether	N.D.	N.D.	N.D.
Nonabromodiphenyl ether	N.D.	N.D.	N.D.
Decabromodiphenyl ether	N.D.	N.D.	N.D.





















Page 5 of 15

Test Result(s):

Total III.	/ °N	Content	
Tested Item(s)	Sample No.4	Sample No.5	Sample No.6
Polybrominated Biphenyls(PBBs)			
Monobromobiphenyl	N.D.	N.D.	N.D.
Dibromobiphenyl	N.D.	N.D.	N.D.
Tribromobiphenyl	N.D.	N.D.	N.D.
Tetrabromobiphenyl	N.D.	N.D.	N.D.
Pentabromobiphenyl	N.D.	N.D.	N.D.
Hexabromobiphenyl	N.D.	N.D.	N.D.
Heptabromobiphenyl	N.D.	N.D.	N.D.
Octabromobiphenyl	N.D.	N.D.	N.D.
Nonabromobiphenyl	N.D.	N.D.	N.D.
Decabromobiphenyl	N.D.	N.D.	N.D.
Polybrominated Diphenyl Ethers(PB	DEs)	•	
Monobromodiphenyl ether	N.D.	N.D.	N.D.
Dibromodiphenyl ether	N.D.	N.D.	N.D.
Tribromodiphenyl ether	N.D.	N.D.	N.D.
Tetrabromodiphenyl ether	N.D.	N.D.	N.D.
Pentabromodiphenyl ether	N.D.	N.D.	N.D.
Hexabromodiphenyl ether	N.D.	N.D.	N.D.
Heptabromodiphenyl ether	N.D.	N.D.	N.D.
Octabromodiphenyl ether	N.D.	N.D.	N.D.
Nonabromodiphenyl ether	N.D.	N.D.	N.D.
Decabromodiphenyl ether	N.D.	N.D.	N.D.



















Page 6 of 15

rest	Resu	lu	S):

The state of the section		Content		
Tested Item(s)	Sample No.7	Sample No.8	Sample No.10	
Polybrominated Biphenyls(PBBs)			,	
Monobromobiphenyl	N.D.	N.D.	N.D.	
Dibromobiphenyl	N.D.	N.D.	N.D.	
Tribromobiphenyl	N.D.	N.D.	N.D.	
Tetrabromobiphenyl	N.D.	N.D.	N.D.	
Pentabromobiphenyl	N.D.	N.D.	N.D.	
Hexabromobiphenyl	N.D.	N.D.	N.D.	
Heptabromobiphenyl	N.D.	N.D.	N.D.	
Octabromobiphenyl	N.D.	N.D.	N.D.	
Nonabromobiphenyl	N.D.	N.D.	N.D.	
Decabromobiphenyl	N.D.	N.D.	N.D.	
Polybrominated Diphenyl Ethers(PB)	DEs)			
Monobromodiphenyl ether	N.D.	N.D.	N.D.	
Dibromodiphenyl ether	N.D.	N.D.	N.D.	
Tribromodiphenyl ether	N.D.	N.D.	N.D.	
Tetrabromodiphenyl ether	N.D.	N.D.	N.D.	
Pentabromodiphenyl ether	N.D.	N.D.	N.D.	
Hexabromodiphenyl ether	N.D.	N.D.	N.D.	
Heptabromodiphenyl ether	N.D.	N.D.	N.D.	
Octabromodiphenyl ether	N.D.	N.D.	N.D.	
Nonabromodiphenyl ether	N.D.	N.D.	N.D.	
Decabromodiphenyl ether	N.D.	N.D.	N.D.	























Test Result(s):

Page 7 of 15

T. 4. 11((.)		Content	
Tested Item(s)	Sample No.1	Sample No.2	Sample No.3
Polycylic Aromatic Hydrocar	bons(PAHs)		
Naphthalene	N.D.	N.D.	N.D.
Acenaphthylene	N.D.	N.D.	N.D.
Acenaphthene	N.D.	N.D.	N.D.
Fluorene	N.D.	N.D.	N.D.
Phenanthrene	N.D.	N.D.	N.D.
Anthracene	N.D.	N.D.	N.D.
Fluoranthene	N.D.	N.D.	N.D.
Pyrene	N.D.	N.D.	N.D.
Benzo[a]anthracene	N.D.	N.D.	N.D.
Chrysene	N.D.	N.D.	N.D.
Benzo[b]fluoranthene	N.D.	N.D.	N.D.
Benzo[k]fluoranthene	N.D.	N.D.	N.D.
Benzo[a]pyrene	N.D.	N.D.	N.D.
Indeno[1,2,3-cd]pyrene	N.D.	N.D.	N.D.
Dibenzo[a,h]anthracene	N.D.	N.D.	N.D.
Benzo[g,h,i]perylene	N.D.	N.D.	N.D.







































Report No.:RLSZE0011899302

Page 8 of 15

Test Result(s):

Vaphthalene Acenaphthylene Acenaphthene Cluorene Chenanthrene Cluoranthene Cluoranthene Cluoranthene Cluoranthene Chrysene Genzo[a]anthracene Genzo[b]fluoranthene	Content					
Tested Item(s)	Sample No.4	Sample No.5	Sample No.6			
Polycylic Aromatic Hydrocarb	ons(PAHs)					
Naphthalene	N.D.	N.D.	N.D.			
Acenaphthylene	N.D.	N.D.	N.D.			
Acenaphthene	N.D.	N.D.	N.D.			
Fluorene	N.D.	N.D.	N.D.			
Phenanthrene	N.D.	N.D.	N.D.			
Anthracene	N.D.	N.D.	N.D.			
Fluoranthene	N.D.	N.D.	N.D.			
Pyrene	N.D.	N.D.	N.D.			
Benzo[a]anthracene	N.D.	N.D.	N.D.			
Chrysene	N.D.	N.D.	N.D.			
Benzo[b]fluoranthene	N.D.	N.D.	N.D.			
Benzo[k]fluoranthene	N.D.	N.D.	N.D.			
Benzo[a]pyrene	N.D.	N.D.	N.D.			
Indeno[1,2,3-cd]pyrene	N.D.	N.D.	N.D.			
Dibenzo[a,h]anthracene	N.D.	N.D.	N.D.			
Benzo[g,h,i]perylene	N.D.	N.D.	N.D.			









































Page 9 of 15

Test Result(s):


T. 4. 1 H (2)	Content					
Tested Item(s)	Sample No.7	Sample No.8	Sample No.10			
Polycylic Aromatic Hydrocarbons	s(PAHs)					
Naphthalene	N.D.	3.2 mg/kg	N.D.			
Acenaphthylene	N.D.	N.D.	N.D.			
Acenaphthene	N.D.	N.D.	N.D.			
Fluorene	N.D.	N.D.	N.D.			
Phenanthrene	N.D.	N.D.	N.D.			
Anthracene	N.D.	N.D.	N.D.			
Fluoranthene	N.D.	N.D.	N.D.			
Pyrene	N.D.	N.D.	N.D.			
Benzo[a]anthracene	N.D.	N.D.	N.D.			
Chrysene	N.D.	N.D.	N.D.			
Benzo[b]fluoranthene	N.D.	N.D.	N.D.			
Benzo[k]fluoranthene	N.D.	N.D.	N.D.			
Benzo[a]pyrene	N.D.	N.D.	N.D.			
Indeno[1,2,3-cd]pyrene	N.D.	N.D.	N.D.			
Dibenzo[a,h]anthracene	N.D.	N.D.	N.D.			
Benzo[g,h,i]perylene	N.D.	N.D.	N.D.			

Note: The samples had been dissolved totally tested for Lead, Cadmium, Mercury.


- -MDL = Method Detection Limit
- -N.D. = Not Detected (<MDL)
- -mg/kg = ppm = parts per million
- -Negative = Absence of Cr(VI), the detected Cr(VI) concentration in the boiling water extraction solution is less than 0.02 mg/kg with 50cm^2 sample surface area used.
- Remark:1.According to the client's statement, the material of sample No.1~9 in this report is the same as the sample No.1~9 in report No. RLSZE00118993, so the test result(s) are presented in reference to that one.
 - 2.According to the client's statement, the material of sample No.10, 11 in this report is the same as the sample No.10, 11 in report No. RLSZE0011899301, so the test result(s) are presented in reference to that one.






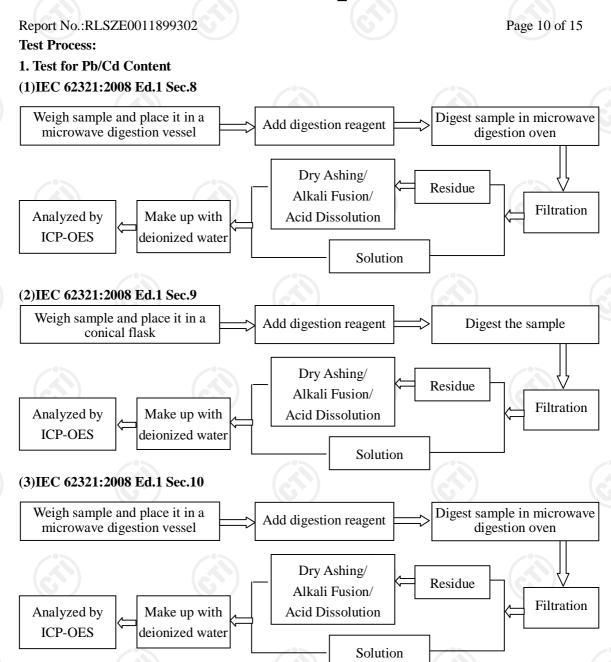



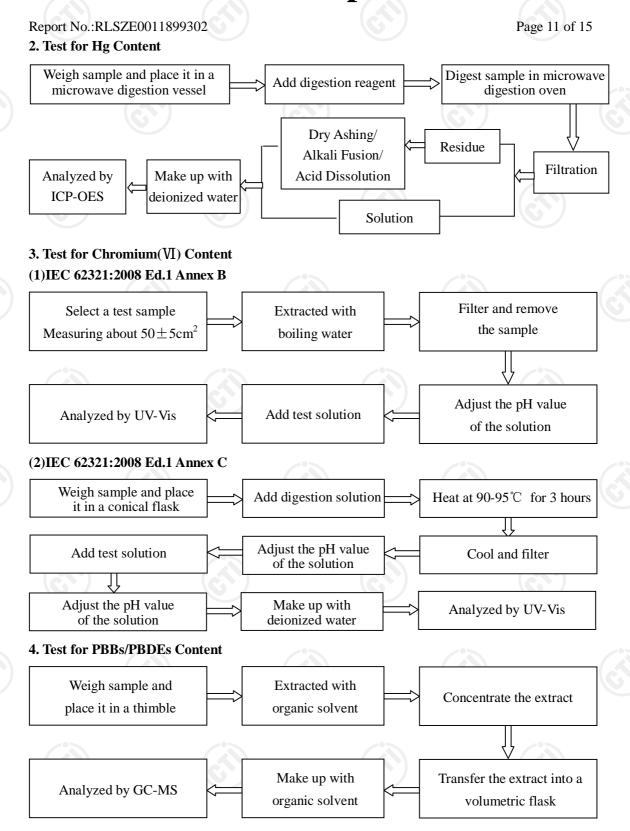



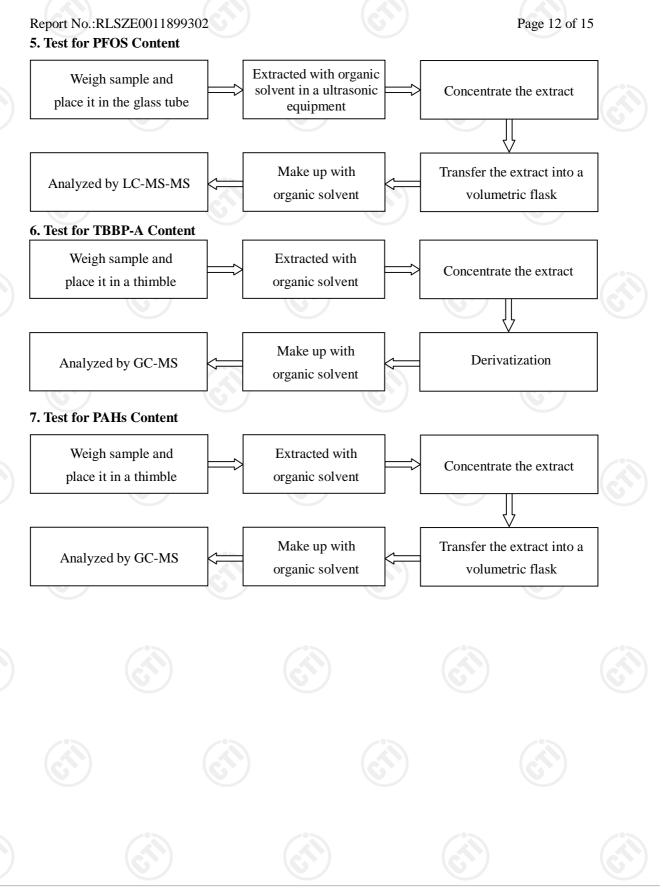



Report No.:RLSZE0011899302

Part No.

CENTRE TESTING INTERNATIONAL CORPORATION

Page 13 of 15

Part No.									
YL-1861	YL-21K12	YL-2212L	YL-2615	YL-3561	YL-4614	YL-6014	YL-6100	YL-8100	
YL-2112	YL-21K13	YL-2214	YL-2622	YL-4500	YL-4615	YL-6014L	YL-6145	YL-8113	
YL-2112L	YL-21K14	YL-2215	YL-2623	YL-4512	YL-4623	YL-6015	YL-6146	YL-8115	
YL-2113	YL-21K15	YL-2215L	YL-2661	YL-4514	YL-4645	YL-6015L	YL-8013	YL-8121	
YL-2113A	YL-21K21	YL-2245	YL-3112	YL-4515	YL-4821	YL-6021	YL-8013L	YL-8122	
YL-2113L	YL-21K21L	YL-2246	YL-3114	YL-4523	YL-4823	YL-6021L	YL-8015	YL-8123	
YL-2121	YL-21K22	YL-223	YL-3412	YL-4535	YL-6012	YL-6022	YL-8021	YL-2300A	
YL-2121L	YL-21K23	YL-2300	YL-3413	YL-4546	YL-6012L	YL-6022L	YL-8022	YL-2300B	
YL-2135	YL-21K35	YL-2361	YL-3415	YL-4600	YL-6013	YL-6023	YL-8023	YL-3413A	
YL-2161	YL-2212	YL-2600	YL-344	YL-4612	YL-6013L	YL-6035	YL-8035	YL-2212LA	
YP-14	YP-23K	YP-47	YC-01	YC-12G	YC-13K	YC-18L	YC-45	YD-05	YD-18
YP-04	YP-24	YP-48	YC-04	YC-12K	YC-13L	YC-18A	YC-46	YD-06	YD-19
YP-05	YP-24K	YP-49	YC-05	YC-12L	YC-13LG	YC-19	YC-52	YD-07	YD-20
YP-20	YP-24L	YP-50	YC-05-1	YC-12T	YC-13S	YC-20	YC-53	YD-09	YD-21
YP-21	YP-25	YP-51	YC-05A	YC-12-01	YC-13W	YC-20L	YC-54	YD-10	YD-22
YP-21K	YP-26	YP-60	YC-06	YC-12GL	YC-13F	YC-20LR	YC-55	YD-11	YD-23
YP-21A	YP-26A	YP-60L	YC-07W	YC-13	YC-14	YC-21	YC-56	YD-12	YD-24
YP-21S	YP-26B	YP-61	YC-08	YC-13A	YC-14G	YC-21A	YC-58	YD-13	YD-25
YP-21C	YP-26C	YP-62	YC-09	YC-13B	YC-14L	YC-22	YC-59	YD-14	YD-26
YP-21T	YP-30	YP-63	YC-10	YC-13BL	YC-14GL	YC-23	YC-72	YD-15	YD-27
YP-21H	YP-31	YP-71	YC-11	YC-13C	YC-14S	YC-24	YC-73	YD-16	YD-28
YP-03H	YP-34	YP-80	YC-12	YC-13D	YC-15	YC-25	YC-77	YD-17	YD-29
YP-22	YP-38	YP-81	YC-12A	YC-13E	YC-16	YC-25L	YC-79	YD-17A	YD-30
YP-22K	YP-45		YC-12C	YC-13G	YC-17	YC-35		YD-17B	
YP-23	YP-46		YC-12D	YC-13H	YC-18			YD-17L	







Report No.:RLSZE0011899302

Page 14 of 15

Photo(s) of the sample(s)

Sample No.1

Sample No.2



Sample No.3



Sample No.4



Sample No.5



Sample No.6







Report No.: RLSZE0011899302 Page 15 of 15

Photo(s) of the sample(s)


Sample No.7









Sample No.11

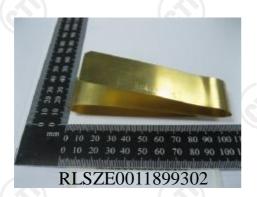

Sample No.8



Sample No.10

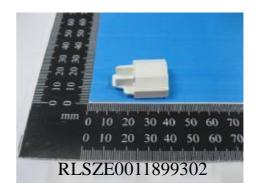

Sample No.12



*** End of report ***

This report is considered invalidated without the Special Seal for Inspection of the CTI, This report shall not be altered, increased or deleted. The results shown in this test report refer only to the sample(s) tested. Without written approval of CTI, this test report shall not be copied except in full and published as advertisement.

Building C, Hongwei Industrial Zone, Baoan 70 District, Shenzhen

