


TABLE 1
USB-MB-05S = 0.5m
USB-MB-2S = 2m

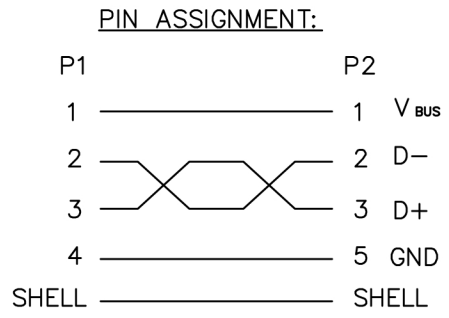

ELECTRICAL CHARACTER:
 1.100% OPEN & SHORT TESTING.

				GENERAL TOLERANCES (UNLESS SPECIFIED)		CUST PART NO.:				
4	PVC: BLACK.	g	12	.XXX: ±0.15	ANGULAR: ±3°	DESIGN: ERIC	SCALE: NONE	UNIT: mm	THIRD ANGLE PROJECTION	
3	CONN: MICRO USB BM,GOLD PLATED,SHELL:NICKEL PLATED,BLACK INSULATOR	PCS	1	.XX: ±0.25		CHECKED: ERIC	TITLE: USB 2.0 AM TO MICRO 5P CABLE			
2	CONN: USB AM,GOLD PLATED,SHELL:NICKEL PLATED,WHITE INSULATOR.	PCS	1	.X: ±0.50		APPROVED:	PART NO.: USB AM-MICRO B		REV:A	
1	CABLE: 28/1P(7*0.12) TC+ 26/2C (7*0.16)TC+AL+B(32*0.12CCAM) OD: 4.0MM PVC JACKET,BLACK.	mm	SEE TABLE 1	SIZE A4	DATE: 2019.12.05					
ITEM	DESCRIPTION	UNIT	QT'Y	SHEET NO.: 1 OF 1						