


WEIGHT	CUSTOMER NO:	REMARK
115g-K8	USB3-2V-W	MAG

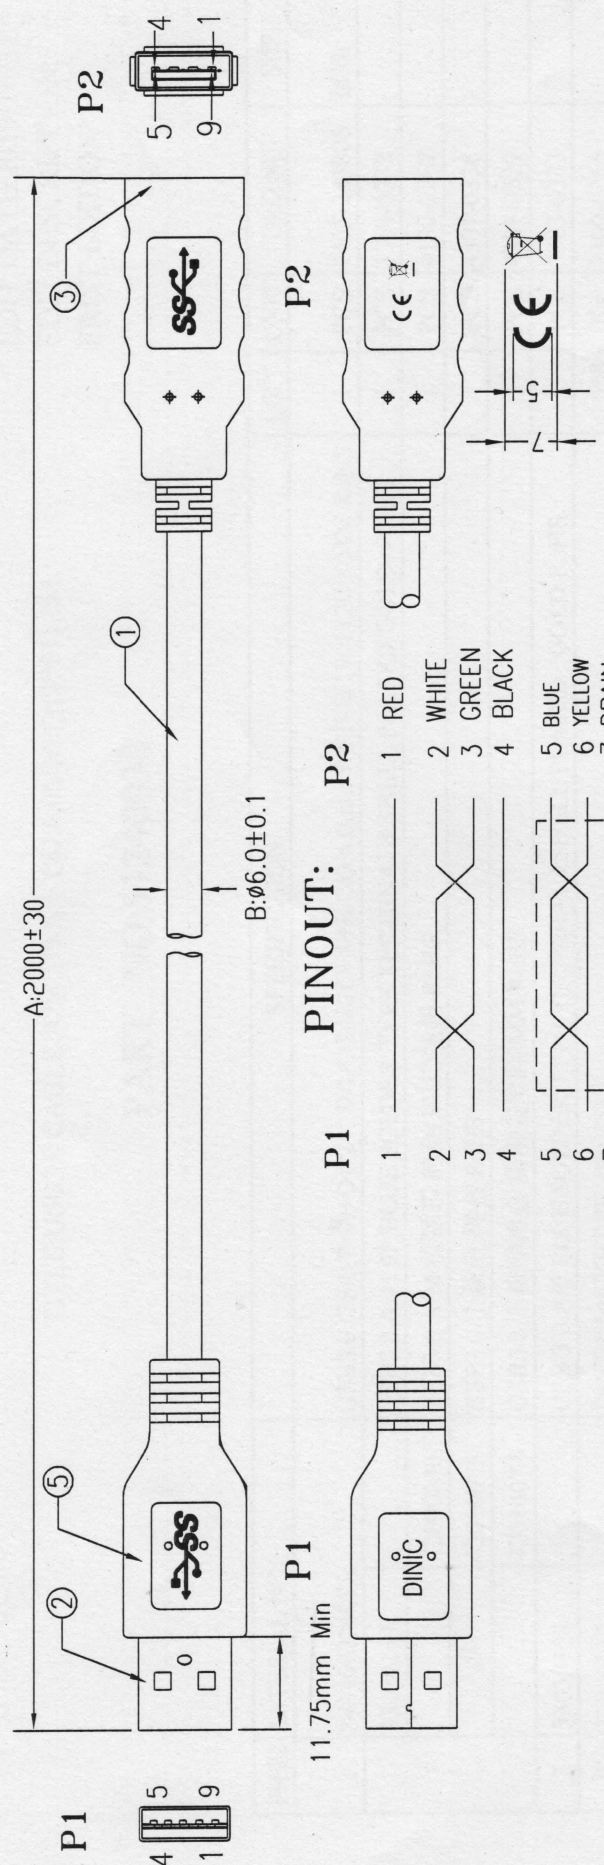

PINOUT: P1 P2

- | | | | |
|---|--------|---|--------|
| 1 | RED | 1 | RED |
| 2 | WHITE | 2 | WHITE |
| 3 | GREEN | 3 | GREEN |
| 4 | BLACK | 4 | BLACK |
| 5 | BLUE | 5 | BLUE |
| 6 | YELLOW | 6 | YELLOW |
| 7 | DRAIN | 7 | DRAIN |
| 7 | DRAIN | 8 | PURPLE |
| 8 | PURPLE | 9 | ORANGE |
| 9 | ORANGE | | |
- SHELL BRAID SHELL SHELL

NOTES:


- PRIMARY DIM: A, B
- DIE NO P1: 0U04076. DIE NO P2: 0U04084
- 100% SHORT CIRCUIT TEST (100% 短路測試)
- CONDUCTION RESISTANCE: 5Ω (5M ABOVE 10~20Ω)
導通阻抗: 5Ω (5m 以上 10~20Ω)
- INSULATION RESISTANCE: 20MΩ (絕緣阻抗: 20MΩ)
- HI-POT: 300V DC (高壓測試: 300V DC)
- SWAY TEST: PRODUCT LINE 1.5 SECONDS
(SEMI-FINISHED PRODUCTS NOT REQUIRED)
搖擺測試: 成品線 1.5 秒 (半成品不要求)
- 產品符合 "ROHS" 標準。

4	OUTER JACKET PVC 45Pa WHITE(1901) RoHS
3	USB 3.0 A/F BLUE SOLDER TYPE TERMINAL&SHELL PLATED GOLD RoHS
2	USB3.0 A/M 9P BLUE SOLDER TYPE TERMINAL&SHELL PLATED GOLD ROHS
1	USB3.0 (28#1P+A+D)*2+28#1P+24#2C+A+B(112編) OD:6.0mm WHITE(1901) 2000MM RoHS

A	FRIST EDITION	TGR	2019/11/01
REV	DESCRIPTION	C.N.	DATE
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</p> <p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</p>			
TITLE		USB 3.0 CABLE	
DIMENSIONS		TOLERANCE	
0.00 TO 30.00mm		±0.10mm	
30.01 TO 80.00mm		±0.15mm	
80.01 TO 150.00mm		±0.15mm	
150.01mm		±0.20mm	
MATERIAL		APPD.	
FINISH		TGR	
PART NO.		51240030	
SCALE		SHEET 1/1	
UNIT		MM	
SIZE		A4	
REV.		A	



WEIGHT	CUSTOMER NO:	REMARK
115g-K8	USB3-2V-W	MAG

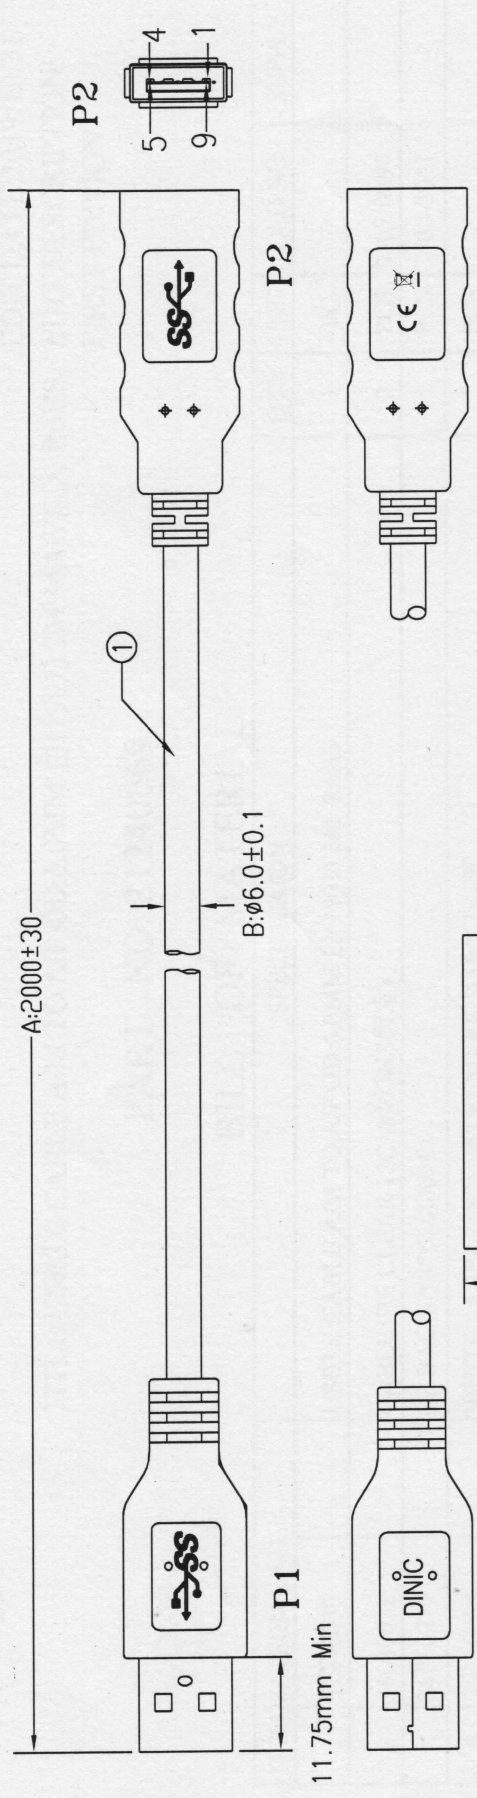


DINIC
PART NO: USB3-2V-W


4 032528 032672

MAG GmbH Vechedler Str.22 38268 Lengede Germany

75

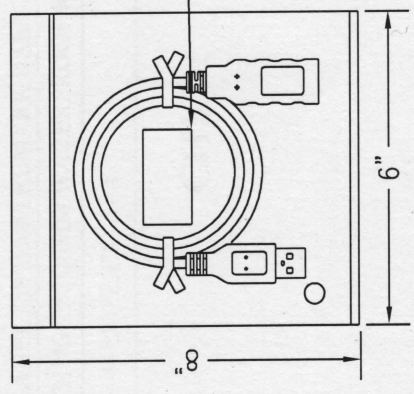

PINOUT:

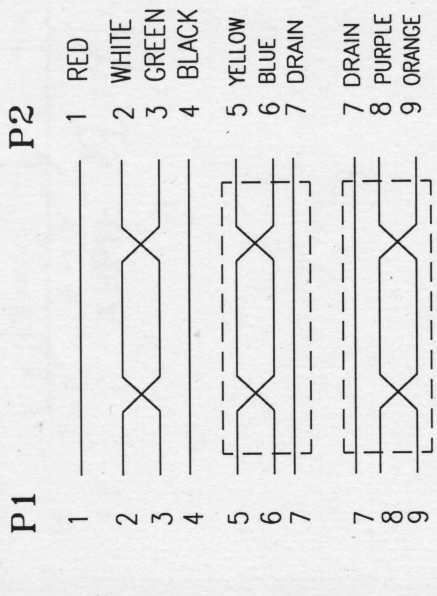

SHELL _____ BRAID _____ SHELL _____

- NOTES:
- 1) IPCS/PE BAG
 - 2) IPCS/LABEL
 - 3) 產品符合"RoHS"標準。

REV.	FIRST EDITION	TGR	2019/11/01										
DESCRIPTION	DESCRIPTION	C.N.	DATE										
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</p> <p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE ±1.0°</p> <table border="1"> <thead> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> </thead> <tbody> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01mm +</td> <td>±0.20mm</td> </tr> </tbody> </table>				DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01mm +	±0.20mm
DIMENSIONS	TOLERANCE												
0.00 TO 30.00mm	±0.10mm												
30.01 TO 80.00mm	±0.13mm												
80.01 TO 150.00mm	±0.15mm												
150.01mm +	±0.20mm												
<p>TITLE: USB 3.0 CABLE</p> <p>CHKD. _____</p> <p>DR. TGR</p> <p>APPRO. <i>Will</i></p> <p>PART NO. 21240069</p> <p>SCALE: / SHEET: 1/1 UNIT: MM SIZE: A4</p> <p>MATERIAL: _____ FINISH: _____</p>													
<p>WIRETEK INTERNATIONAL INVESTMENT LTD.</p>													
<p>REV. A</p>													