
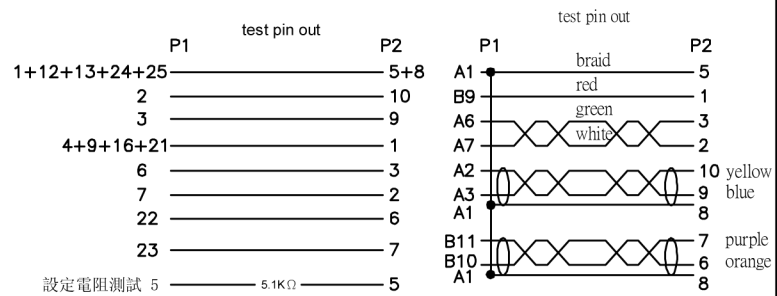

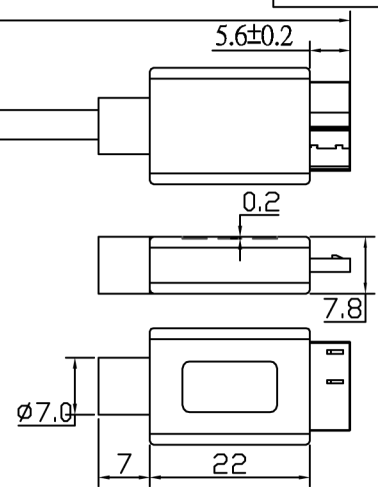
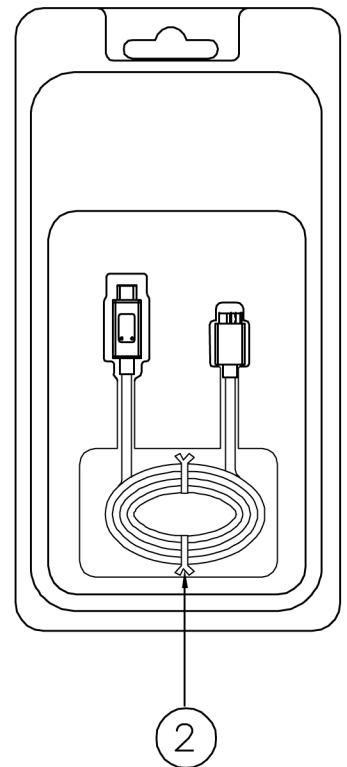
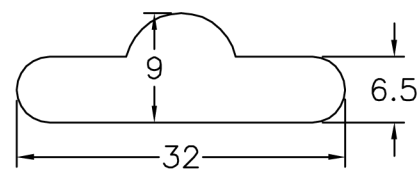




Weight	CUSTOMER NO:	REMARK
33g-K1	USBC-USMB-1M-0	MAG

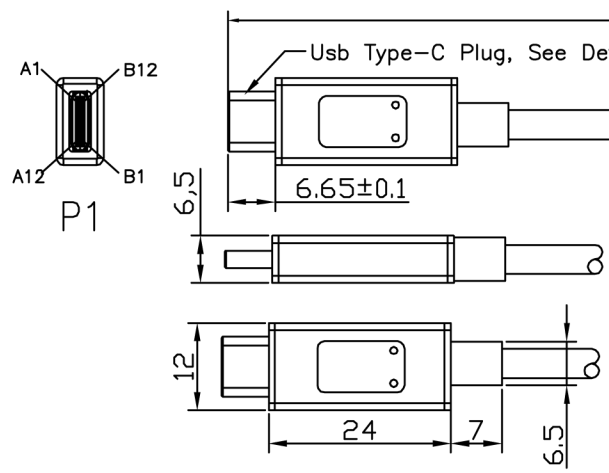

NOTE:
 1) PRIMARY DIM: A, B
 2) IPC/blister + inner blister
 3) RoHS compliant

A	FIRST EDITION	..	2017/5/19
REV.	ECR	DESCRIPTION	C.N. DATE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.		USBC-U3MB-1M	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°			
TITLE		USB3.1 Type C To Micro B Plug Gen1(5Gbps) CABLE WHITE 1M	
DIMENSIONS		TOLERANCE	
0.00 TO 30.00mm		±0.10mm	
30.01 TO 80.00mm		±0.13mm	
80.01 TO 150.00mm		±0.15mm	
150.01mm		±0.20mm	
MATERIAL		PART NO. 25340013	
FINISH		SCALE	
		SHEET 1/1 UNIT MM SIZE A4 REV. A	

Weight	CUSTOMER NO:	REMARK
33g		

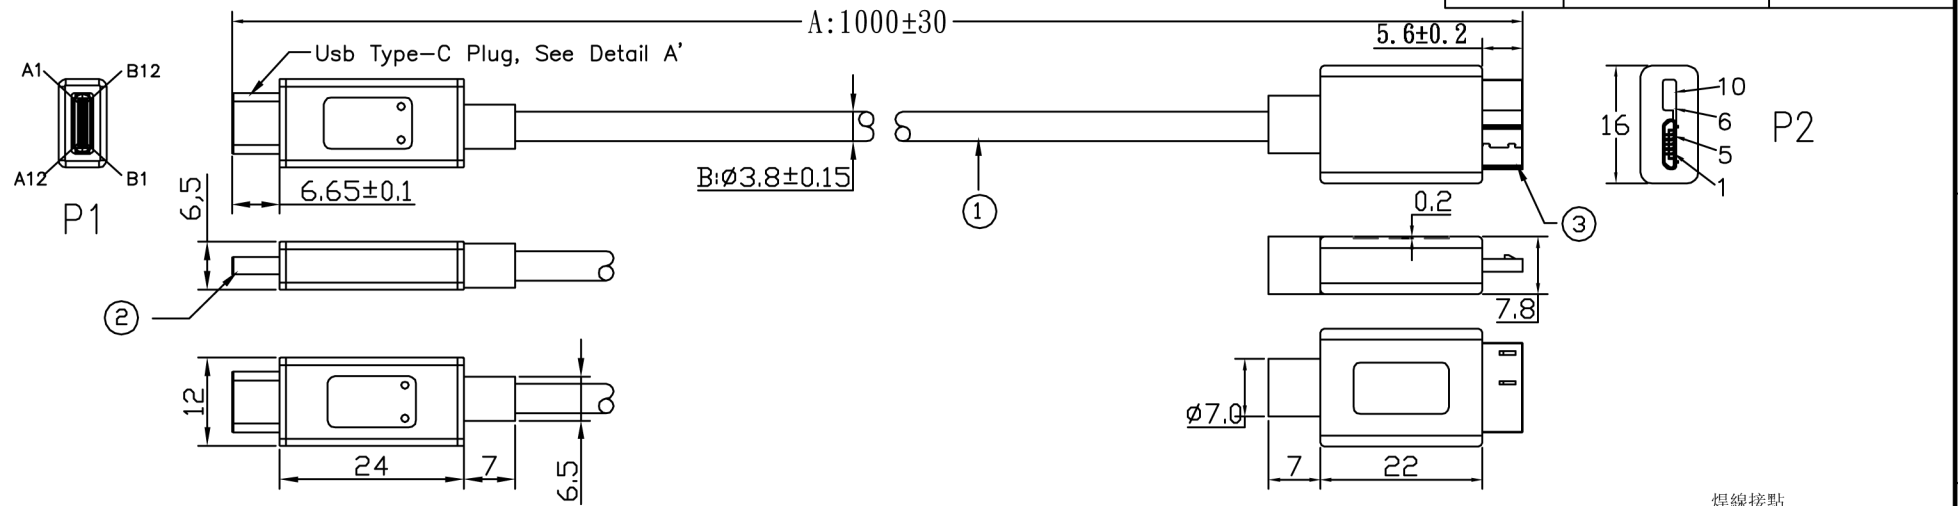

Detail A'

P1 测试接点		P2		P1 焊线接点		P2	
1+12+13+24+25	5+8	A1	5	编织			
2	10	B9	1	红			
3	9	A6	3	绿			
4+9+16+21	1	A7	2	白			
6	3	A2	10				黄蓝
7	2	A3	9				
22	6	A11	8				
23	7	B11	7				紫橙
设定电阻测试 5	5.1KΩ	B10	6				
		A1	8				

NOTE:

- 1)PRIMARY DIM:A. B
- 2)SHORT AND OPEN 100 % TESTING
- 3)CONDUCTOR RESISTANCE 3 Ω
- 4)RoHS COMPLIANT
- 5)DIE NO P1:OU04210. DIE NO P2:OU04240. IU04240

4	OUTER JACKET PVC 45Pa WHITE(1901) RoHS
3	USB3.0 Micro B/M 10P BLACK SOLDER TYPE TERMINAL PLATED GOLD RoHS
2	USB 3.1 TYPE C/M TERMINAL GOLD PLATED W/PCB FOR USB3.1 A,B,Micro(5.1KΩ 10NF)
1	UL2725 (34#*1P+AD)*2+32#*1P+26#1C+A+B(128BTA) WHITE(1901) OD:3.8MM 1000MM RoHS (OUTER JACKET :PVC)

A	FIRST EDITION	..	2017/5/19
REV. ECR	DESCRIPTION	C.N.	DATE
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</p>			
<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</p>		TITLE	
<p>DIMENSIONS TOLERANCE</p> <p>0.00 TO 30.00mm ±0.10mm</p> <p>30.01 TO 80.00mm ±0.13mm</p> <p>80.01 TO 150.00mm ±0.15mm</p> <p>150.01mm ±0.20mm</p>		<p>USB3.1 Type C TO Micro B Plug Gen1(5Gbps) CABLE WHITE 1M</p>	
MATERIAL		CHKD. CONF.	
FINISH		DR. APPD.	
		PART NO. 55340033	
		SCALE SHEET 1/1 UNIT MM SIZE A4 REV. A	